

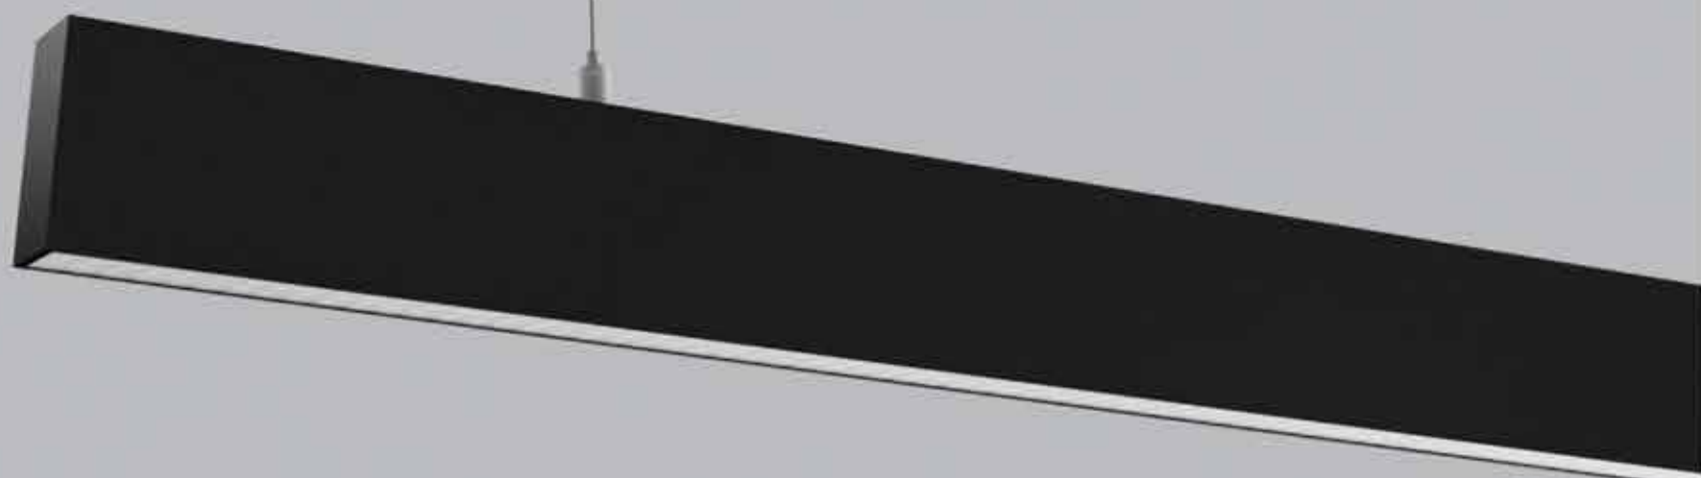


divinity lights

VIRAJ 5690  
PRISMATIC



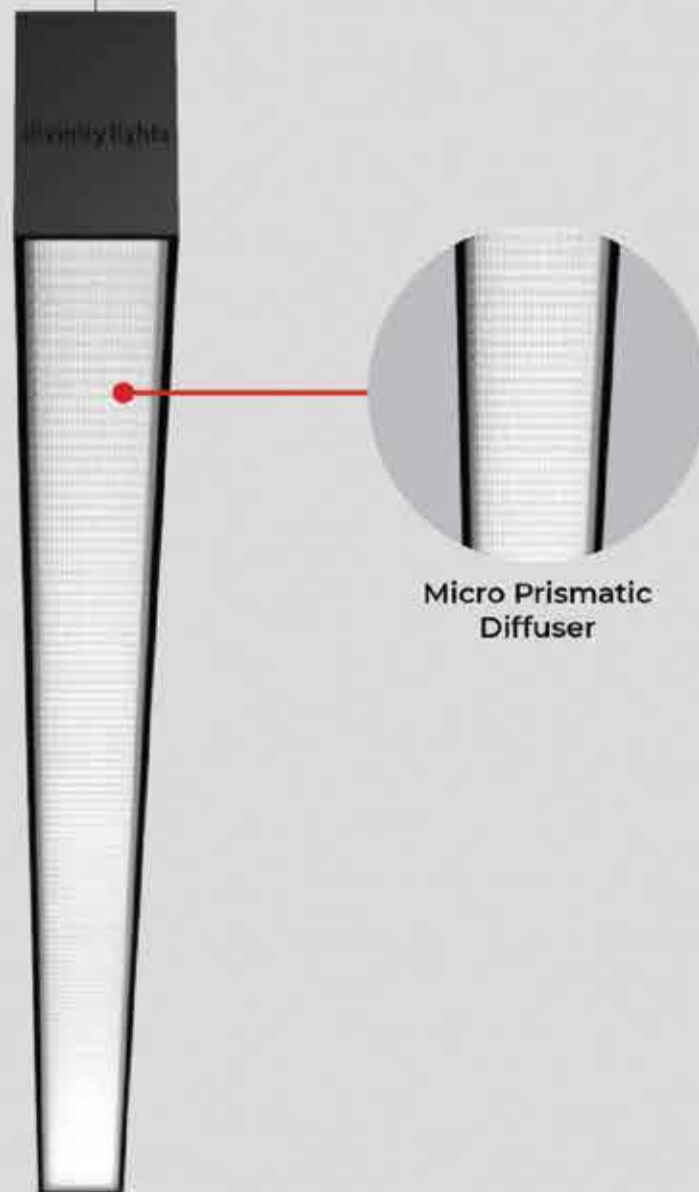

## VIRAJ 5690 PRISMATIC

Viraj 5690 Prismatic sleek and slim linear fixture has:

- Luminaire housing of extruded aluminium
- High-performance Micro Prismatic Diffuser
- Snap-fit system No visible screw
- Better refractive index to reduce glare
- LED PCB mounted on insert design with heat sink
- Bottom opening for easy maintenance
- Pendant with cable suspension
- M6 bolt for M6 fastener
- High-performance PMMA & Micro Prismatic Diffuser
- Energy-efficient LED with high color rendering

### Quick Info

CRI  $\geq 90$   
 3000K/ 4000K/ 5700K  
 Tunable White 2700K-6500K  
 ON-OFF/ON-OFF (FLICKER FREE)  
 DALI-2 DT6/ DALI-2 DT8 / DALI +  
 SDCM<3  
 Micro Prismatic Diffuser  
 L70 @ 50,000h  
 Aluminium


### Types

Pendant/ Surface/ Recessed


### Single Line Diagram

#### Pendant Mounted

Outer Profile Code  
SY-101

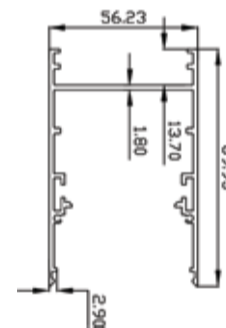


Insert Profile Code  
SY-102


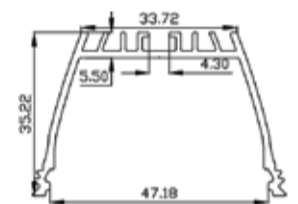


#### Recessed Mounted

Outer Profile Code  
SY-104

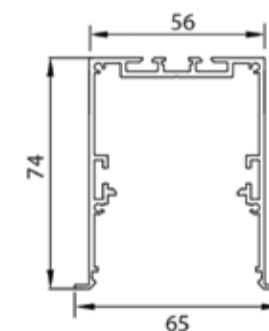

Insert Profile Code  
SY-102

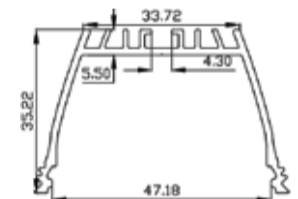

CRI  $\geq 90$



TUNABLE  
WHITE

## VIRAJ 5690 PRISMATIC



## VIRAJ 5690 ( DIRECT )

System Power	Dimension
7W	L = 300mm
14	L = 600mm
21	L = 900mm
28	L = 1200mm
56	L = 2400mm

## VIRAJ 5690 ( DIRECT-INDIRECT )

System Power	Dimension
9W	L = 300mm
18	L = 600mm
27	L = 900mm
35	L = 1200mm
70	L = 2400mm

## Order Options

### CCT (Colour Temperature)

3000K

4000K

5700K

Tunable White 2700K-6500K



### CRI

>90

### Beam Angle

95.8°

### Control

ON-OFF



ON-OFF (FLICKER FREE)



DALI-2 DT6



DALI-2 DT8



DALI+



### Mounting

Pendant

Surface

### Material Colour

RAL As Per Request

### Photometric Details

