


VIRAJ 70

divinity lights

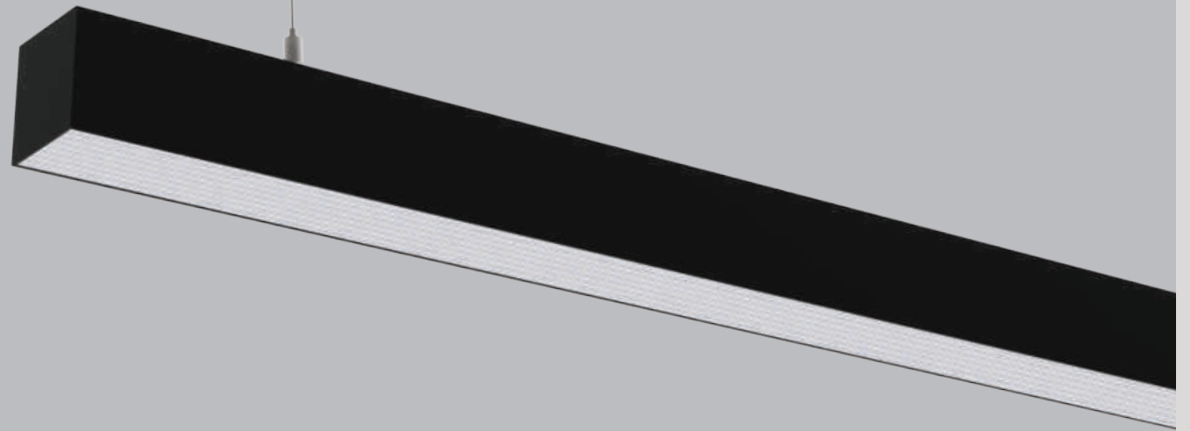

divinity lights

Quick Info

CRI ≥ 80/ 90/ 95

3000K/ 4000K/ 5700K/ 6500K

Tunable White 2700K-6500K

Up to 100lm/W

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 / DALI-2 DT8 / D4i / DALI +

POE (Power Over Ethernet)

SDCM<3

PMMA Diffuser/ Prismatic Diffuser

L70 @ 50,000h


Aluminium

Types




Pendant/ Surface/ Recessed

Single Line Diagram

Pendant/ Surface



Recessed



VIRAJ 70

Viraj 70 sleek and slim linear fixture has :


- Luminaire housing of extruded aluminium
- No visible screw
- Snap-fit system
- No visible screw and Surface powder coated
- LED PCB mounted on insert design with heat sink
- Bottom opening for easy maintenance
- Pendant with cable suspension
- M6 bolt for M6 fastener
- High-performance PMMA & Micro Micro Prismatic Diffuser
- Energy-efficient LED

Colours



Light Distribution

Direct Direct-Indirect



CRI ≥ 80/ 90/ 95



TUNABLE
WHITE

VIRAJ 70



VIRAJ 70 (DIRECT)

Product Order Code	System Power	Dimensions
1004-1 1	8W	L = 300mm
1004-1 2	16W	L = 600mm
1004-1 3	24W	L = 900mm
1004-1 4	35W	L = 1200mm
1004-1 5	70W	L = 2400mm

VIRAJ 70 (DIRECT-INDIRECT)

Product Order Code	System Power	Dimensions
1004- 1	15W	L = 300mm
1004- 2	30W	L = 600mm
1004- 3	40W	L = 900mm
1004- 4	60W	L = 1200mm
1004- 5	120W	L = 2400mm

Order Options

Distribution	
Direct	1
Direct-Indirect	
Up-50% / Down-50%	2
Up-30% / Down-70%	3
Up-70% / Down-30%	4
Up-20% / Down-80%	5
Up-80% / Down-20%	6

Lumen Type	
Low	1
High	2

CCT (Colour Temperature)	
3000K	1
4000K	2
5700K	3
6500K	4
Tunable White 2700K-6500K	5

CRI	
>80	1
>90	2
>95	3







Beam Angle	
110°	

Control	
ON-OFF	1
ON-OFF (FLICKER FREE)	2
DALI-2	3
DALI-2 DT8	4
DALI +	5
D4i	6
POE (Power Over Ethernet)	7

Mounting Type	
Pendant	1
Surface	2
Recessed	3

Material Colour	
Black	1
White	2
Grey	3

Accessories


Product Order Code	Accessories Name	Accessories Image
1004-01 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	LED PCB	
1004-02	Suspension Wire	
1004-03	PMMA Diffuser	
1004-04	Micro Prismatic Diffuser	
1004-05	Profile Connector	
1004-06 <input checked="" type="checkbox"/>	Profile Endcap	

Order Options

Lumen Type

- Low 1
- High 2

CCT (Colour Temperature)

- 3000K 1
- 4000K 2
- 5700K 3
- 6500K 4
- Tunable White 2700K-6500K  5

CRI

- >80 1
- >90 2
- >95 3

Material Colour

- Black 1
- White 2
- Grey 3