


LUMINAIRE PHOTOMETRIC TEST REPORT

Report number:


MANUFACTURER: DIVINITY		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,		
NAME: VIRAJ DAISY MINI ROUND	TYPE: .5W 5700K CRI90	WEIGHT:
SPECIFICATION: FULHAM 600 MA	DIMENSION: 1200*42*36.5 MM	SERIAL No.:

DATA OF LAMP		Imax (cd)	3776	S/MH (C0/180)	1.00
MODEL	DAISY MINI ROUND	EFFICIENCY (%)	100.0	S/MH (C90/270)	0.95
NOMINAL POWER (W)	25	TOTAL FLUX (lm)	3746.0	Voltage (V)	219.5
RATED VOLTAGE (V)	220	EFFICIENCY (lm/W)	148.7	Current (A)	0.120
NOMINAL FLUX (lm)	3746.0	η up (%)	0.0	Power (W)	25.20
LAMPS QUANTITY	1	η down (%)	100.0	Power Factor (PF)	0.986
TEST VOLTAGE (V)	219.5	Effective Flux (lm)	3595.6	EEI	0.095

LUMINOUS INTENSITY DISTRIBUTION

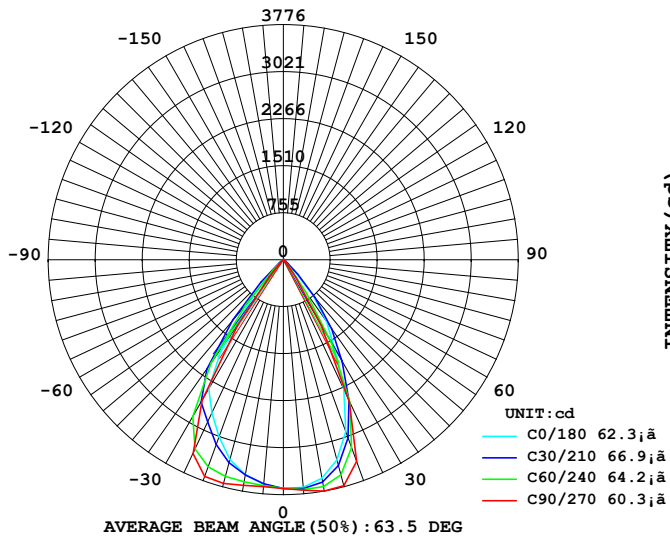

LUMINOUS INTENSITY DISTRIBUTION

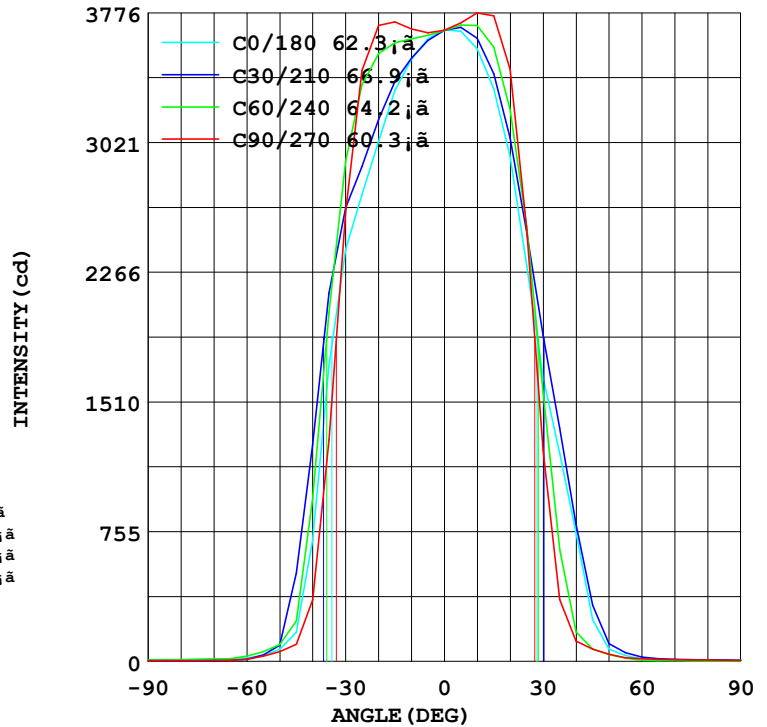

Test System: HOPOO HPG1800
Temperature: 25.3 DEG
Operators:
Test Date: 03-11-2025

Test Set: 5.0 deg/s C-Gamma (TYPE C)
Humidity: 65.0%
Test Distance: 9.900 m
Remarks: 5700K

Color Temperature Data List

Report number:

MANUFACTURER: DIVINITY		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,		
NAME: VIRAJ DAISY MINI ROUND	TYPE: .5W 5700K CRI90	WEIGHT:
SPECIFICATION: FULHAM 600 MA	DIMENSION: 1200*42*36.5 MM	SERIAL No.:


Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:03-11-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:9.900 m
Remarks: 5700K

AVERAGE AND CENTER E Figure

Report number:

MANUFACTURER: DIVINITY		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,		
NAME: VIRAJ DAISY MINI ROUND	TYPE: .5W 5700K CRI90	WEIGHT:
SPECIFICATION: FULHAM 600 MA	DIMENSION: 1200*42*36.5 MM	SERIAL No.:

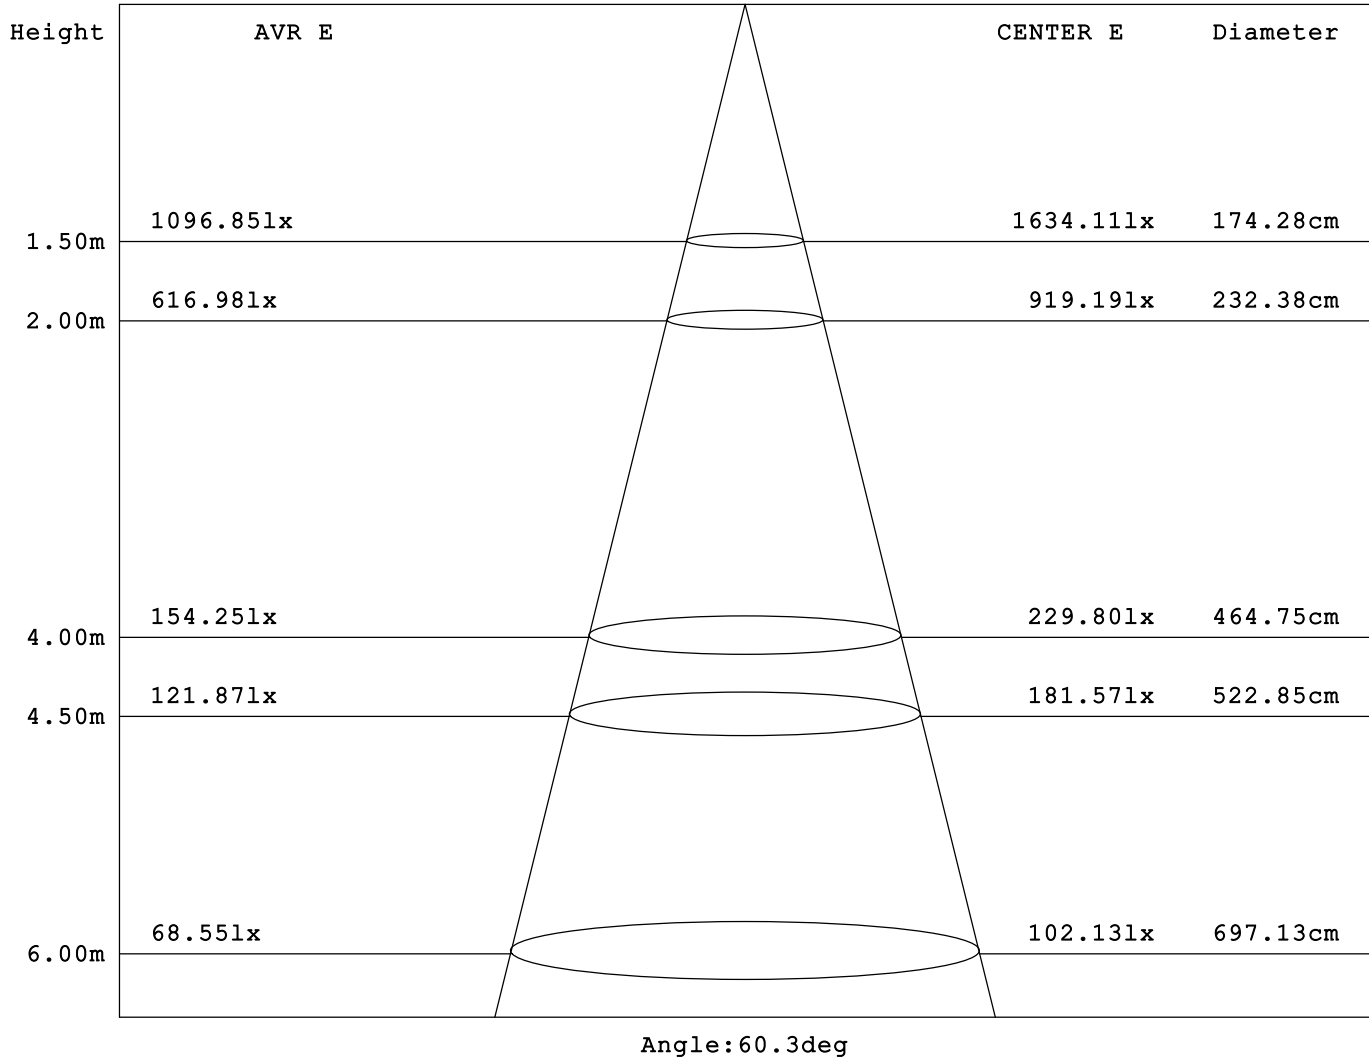

Test System: HOPOO HPG1800
 Temperature: 25.3DEG
 Operators:
 Test Date: 03-11-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity: 65.0%
 Test Distance: 9.900 m
 Remarks: 5700K

ZONAL FLUX DIAGRAM

Report number:

MANUFACTURER: DIVINITY		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,		
NAME: VIRAJ DAISY MINI ROUND	TYPE: .5W 5700K CRI90	WEIGHT:
SPECIFICATION: FULHAM 600 MA	DIMENSION: 1200*42*36.5 MM	SERIAL No.:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Zone	total
10.0	3506	3569	3682	3625	3566	3665	3776	3650	0- 10	348.7	348.7
20.0	3028	3346	3703	3292	2938	3130	3447	3327	10- 20	984.5	1333
30.0	2398	2777	2615	2267	1653	1734	1231	2148	20- 30	1265	2598
40.0	709.2	1107	357.7	857.0	748.8	485.0	118.9	539.3	30- 40	856.3	3455
50.0	70.56	95.80	56.64	109.5	71.15	72.23	42.53	61.64	40- 50	226.3	3681
60.0	19.99	22.00	12.05	26.65	13.42	15.92	15.87	12.69	50- 60	37.50	3719
70.0	13.52	9.212	6.076	9.457	8.134	8.477	10.78	7.742	60- 70	12.08	3731
80.0	10.19	7.399	4.508	7.203	6.076	6.223	7.742	5.684	70- 80	8.251	3739
90.0	10.58	8.036	4.802	6.223	6.370	4.900	5.782	4.655	80- 90	6.939	3746
100.0									90-100		
110.0									100-110		
120.0									110-120		
130.0									120-130		
140.0									130-140		
150.0									140-150		
160.0									150-160		
170.0									160-170		
180.0									170-180		
DEG	LUMINOUS INTENSITY:cd									UNIT:lm	

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:03-11-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:9.900 m
Remarks: 5700K


LUMINANCE LIMITATION CURVES

Report number:

MANUFACTURER: DIVINITY		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,		
NAME: VIRAJ DAISY MINI ROUND	TYPE: .5W 5700K CRI90	WEIGHT:
SPECIFICATION: FULHAM 600 MA	DIMENSION: 1200*42*36.5 MM	SERIAL No.:

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
		2000	1000	500	<=300				
1.15	A								
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

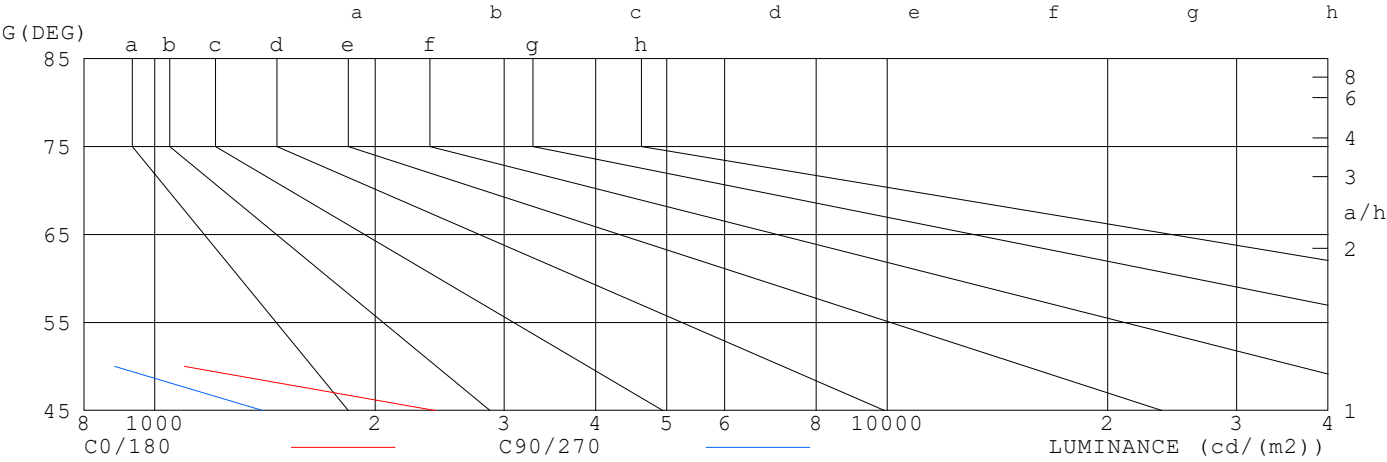

LUMINANCE cd/m2

G (DEG)	C0/180	C90/270
85	1136	484
80	587	260
75	443	197
70	395	178
65	385	169
60	400	241
55	591	531
50	1098	881
45	2416	1404


Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:03-11-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:9.900 m
Remarks: 5700K

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER: DIVINITY		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,		
NAME: VIRAJ DAISY MINI ROUND	TYPE: .5W 5700K CRI90	WEIGHT:
SPECIFICATION: FULHAM 600 MA	DIMENSION: 1200*42*36.5 MM	SERIAL No.:

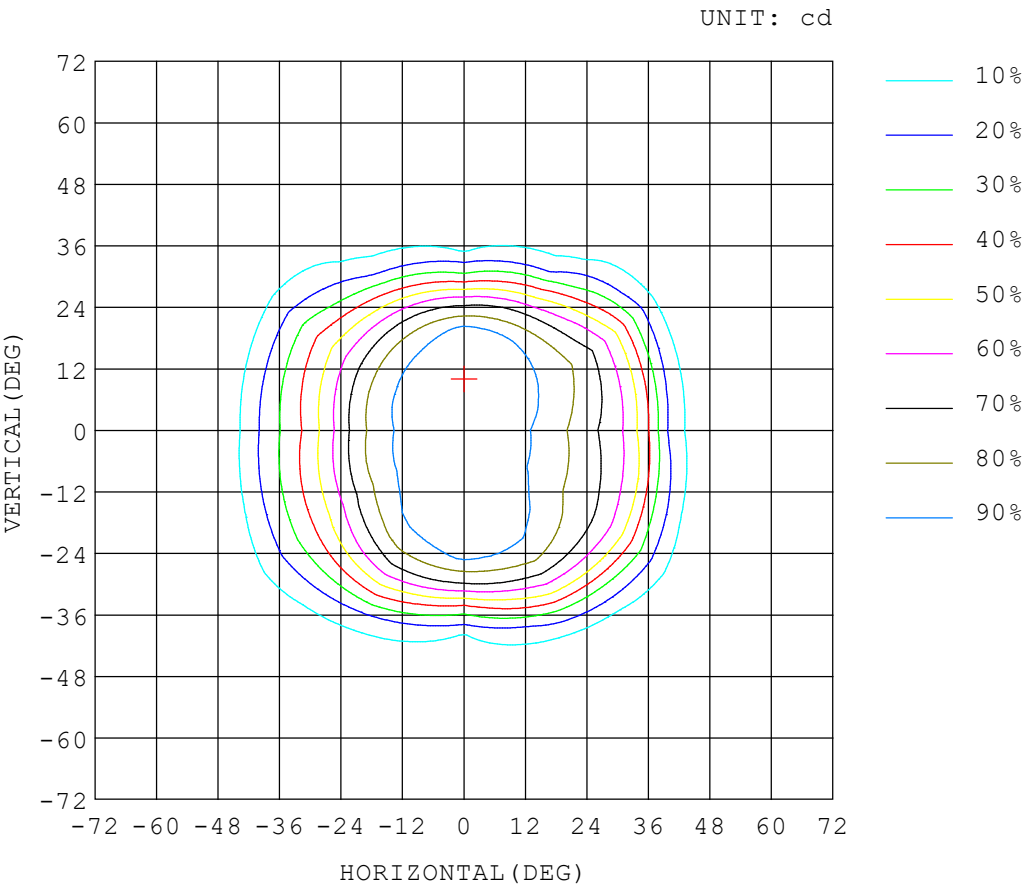


Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:03-11-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:9.900 m
Remarks: 5700K

ISOLUX DIAGRAM

Report number:

MANUFACTURER: DIVINITY		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,		
NAME: VIRAJ DAISY MINI ROUND	TYPE: .5W 5700K CRI90	WEIGHT:
SPECIFICATION: FULHAM 600 MA	DIMENSION: 1200*42*36.5 MM	SERIAL No.:

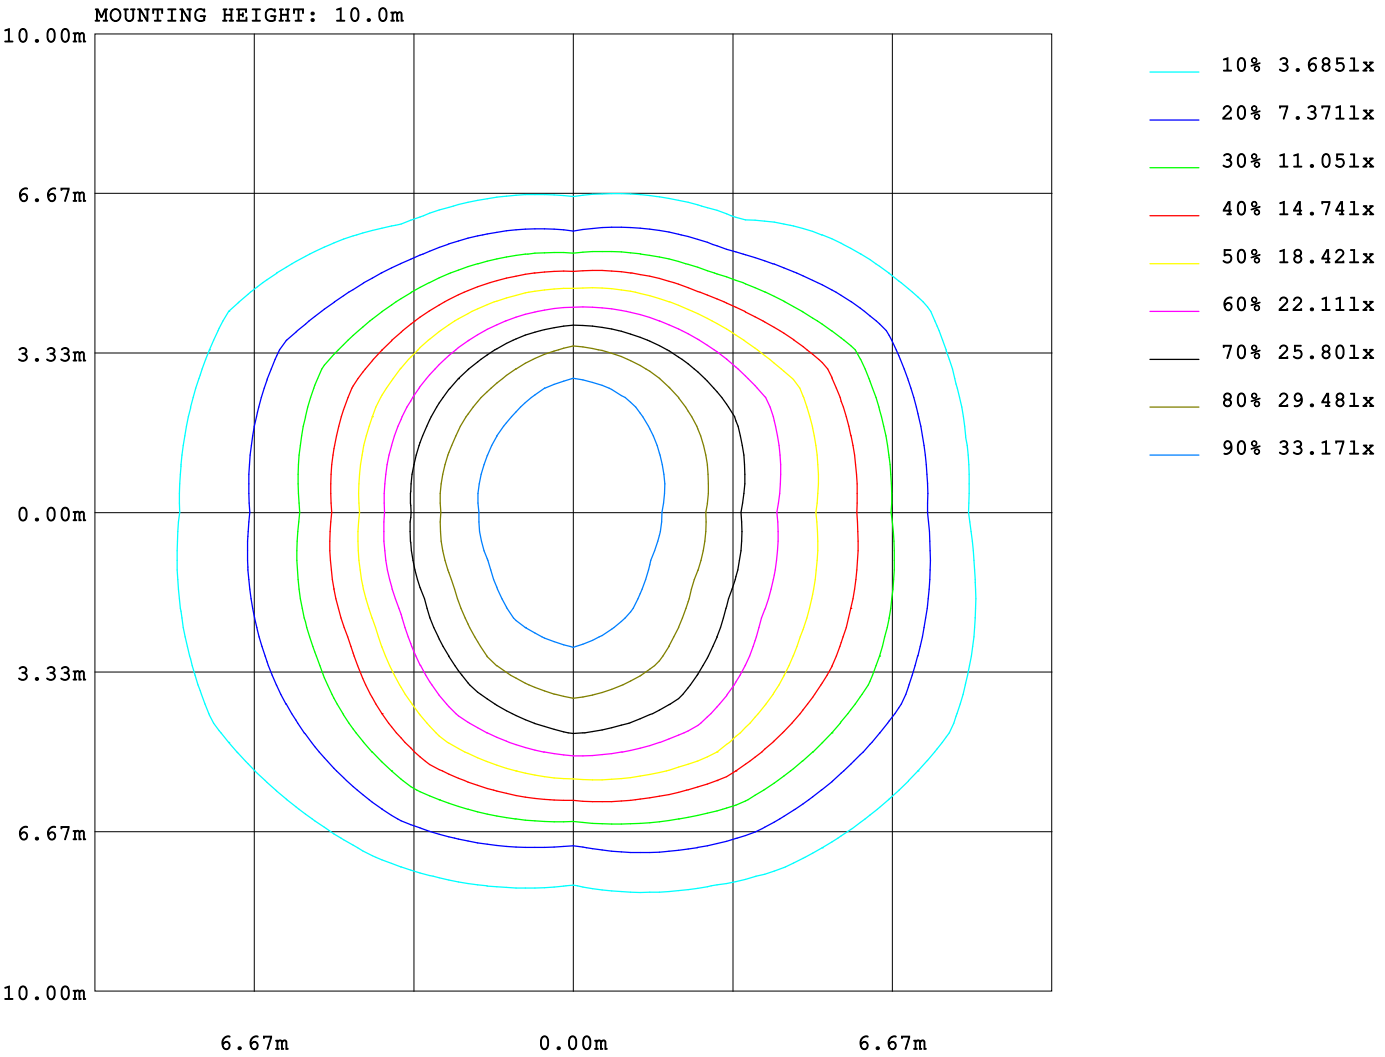

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:03-11-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:9.900 m
Remarks: 5700K

AREA LUMINOUS FLUX

Report number:

MANUFACTURER: DIVINITY

Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,

NAME: VIRAJ DAISY MINI ROUND

TYPE: .5W 5700K CRI90

WEIGHT:

SPECIFICATION: FULHAM 600 MA

DIMENSION: 1200*42*36.5 MM

SERIAL No.:

72	AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
	0.06	0.09	0.11	0.11	0.09	0.08	0.11	0.16	0.21	0.21	0.16	0.11	0.07	0.09	0.10	0.10	0.09	0.06	1.98	0.00		
64	0.06	0.10	0.13	0.14	0.13	0.11	0.15	0.23	0.29	0.29	0.22	0.14	0.09	0.12	0.13	0.12	0.10	0.07	2.60	0.00		
56	0.06	0.11	0.16	0.20	0.25	0.31	0.41	0.56	0.66	0.64	0.53	0.36	0.25	0.21	0.17	0.15	0.11	0.07	5.23	0.00		
48	0.07	0.12	0.22	0.39	0.67	1.00	1.10	1.47	1.64	1.60	1.39	1.00	0.85	0.57	0.32	0.19	0.13	0.08	12.8	0.00		
40	0.07	0.13	0.31	0.80	1.95	3.75	4.65	6.76	7.90	8.04	6.91	4.70	3.47	1.56	0.68	0.27	0.14	0.09	52.2	24.7		
32	0.07	0.15	0.44	1.60	5.91	12.0	18.8	27.8	33.8	34.7	29.9	22.2	14.4	5.50	1.30	0.40	0.16	0.09	210	200		
24	0.07	0.16	0.59	2.91	11.7	24.0	37.5	52.2	62.1	63.3	56.0	44.9	32.0	13.5	2.31	0.54	0.18	0.10	405	398		
VERTICAL (DEG)	0.07	0.17	0.71	4.45	15.9	31.1	48.9	63.4	71.3	71.8	65.7	55.8	41.8	20.1	3.84	0.66	0.21	0.10	496	491		
	0.07	0.17	0.78	5.36	17.6	33.4	52.8	66.1	71.5	71.2	66.1	56.4	43.6	23.3	4.69	0.73	0.22	0.11	515	509		
	0.06	0.17	0.80	5.64	17.9	33.6	53.0	65.9	70.9	70.3	65.1	55.6	43.6	24.1	5.20	0.74	0.21	0.10	514	508		
	0.06	0.16	0.75	5.21	17.0	32.0	50.4	65.0	71.2	70.8	65.1	54.8	42.8	22.7	5.15	0.67	0.19	0.10	504	499		
	0.06	0.14	0.60	3.76	13.8	27.2	44.9	61.2	69.2	69.6	63.9	52.5	37.8	17.7	3.67	0.53	0.16	0.09	467	461		
	0.05	0.11	0.41	2.00	8.35	18.0	32.6	46.8	54.8	56.3	51.7	40.1	23.8	9.64	1.77	0.35	0.12	0.08	347	341		
	0.05	0.08	0.25	0.86	2.93	7.23	13.7	20.1	22.7	24.0	23.4	17.0	8.38	2.82	0.68	0.20	0.10	0.07	145	132		
	0.04	0.06	0.14	0.41	0.98	1.93	3.00	4.10	3.97	4.21	4.54	3.19	1.89	0.86	0.33	0.11	0.07	0.06	29.9	5.07		
	0.04	0.05	0.08	0.20	0.45	0.79	1.03	1.09	1.01	1.02	1.10	1.03	0.76	0.40	0.17	0.08	0.06	0.05	9.44	0.00		
	0.04	0.05	0.07	0.13	0.22	0.36	0.42	0.41	0.34	0.34	0.40	0.40	0.34	0.20	0.12	0.07	0.05	0.05	4.01	0.00		
0.03	0.04	0.07	0.11	0.17	0.22	0.22	0.19	0.15	0.15	0.19	0.21	0.22	0.16	0.11	0.07	0.05	0.05	2.41	0.00			
-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72			
Φ t	1.03	2.07	6.64	34.3	116	228	364	484	544	549	503	411	297	144	30.7	5.96	2.35	1.41	3746			
Φ a	0.00	0.00	0.00	15.4	105	217	354	474	534	539	494	402	287	134	13.3	0.00	0.00	0.00		3596		

Test System:HOPOO HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:03-11-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:9.900 m
 Remarks: 5700K

WEC AND CCEC

Report number:

MANUFACTURER: DIVINITY															
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,															
NAME: VIRAJ DAISY MINI ROUND								TYPE: .5W 5700K CRI90				WEIGHT:			
SPECIFICATION: FULHAM 600 MA								DIMENSION: 1200*42*36.5 MM				SERIAL No.:			

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.182	.104	.033	.176	.100	.032	.163	.093	.030	.151	.087	.028	.141	.082	.026															
2.0	.174	.096	.029	.169	.093	.029	.158	.088	.027	.148	.083	.026	.139	.079	.025															
3.0	.166	.088	.026	.161	.086	.026	.152	.082	.025	.144	.079	.024	.136	.075	.023															
4.0	.158	.082	.024	.154	.081	.024	.146	.078	.023	.139	.075	.023	.132	.072	.022															
5.0	.151	.077	.022	.147	.076	.022	.141	.073	.022	.134	.071	.021	.128	.069	.021															
6.0	.144	.072	.021	.141	.071	.021	.135	.069	.020	.129	.067	.020	.124	.065	.019															
7.0	.138	.068	.019	.135	.067	.019	.130	.066	.019	.125	.064	.019	.120	.062	.018															
8.0	.132	.065	.018	.130	.064	.018	.125	.062	.018	.120	.061	.018	.116	.060	.017															
9.0	.127	.061	.017	.124	.061	.017	.120	.059	.017	.116	.058	.017	.112	.057	.016															
10.0	.122	.058	.016	.120	.058	.016	.116	.057	.016	.112	.056	.016	.109	.055	.016															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.171	.157	.144	.147	.135	.124	.100	.093	.086	.058	.054	.050	.019	.017	.016	
2.0	.157	.132	.112	.134	.114	.097	.092	.079	.068	.053	.046	.040	.017	.015	.013	
3.0	.144	.114	.089	.124	.098	.077	.085	.068	.054	.049	.040	.032	.016	.013	.010	
4.0	.134	.099	.072	.115	.086	.062	.079	.060	.044	.046	.035	.026	.015	.011	.009	
5.0	.126	.087	.059	.108	.076	.051	.075	.053	.036	.043	.031	.021	.014	.010	.007	
6.0	.119	.078	.049	.102	.068	.043	.070	.047	.030	.041	.028	.018	.013	.009	.006	
7.0	.112	.071	.041	.097	.061	.036	.067	.043	.026	.039	.025	.015	.013	.008	.005	
8.0	.107	.065	.036	.092	.056	.031	.064	.039	.022	.037	.023	.013	.012	.008	.004	
9.0	.102	.059	.031	.088	.052	.027	.061	.036	.019	.035	.021	.011	.011	.007	.004	
10.0	.097	.055	.027	.084	.048	.024	.058	.034	.017	.034	.020	.010	.011	.007	.003	

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:03-11-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:9.900 m
Remarks: 5700K

Uncorrected UGR Table

Report number:

MANUFACTURER: DIVINITY		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,		
NAME: VIRAJ DAISY MINI ROUND	TYPE: .5W 5700K CRI90	WEIGHT:
SPECIFICATION: FULHAM 600 MA	DIMENSION: 1200*42*36.5 MM	SERIAL No.:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise				Viewed endwise				
x = 2H y = 2H	15.6	16.6	15.8	16.8	16.9	14.3	15.3	14.5	15.5	15.6
3H	15.4	16.3	15.7	16.5	16.8	14.2	15.0	14.4	15.2	15.5
4H	15.4	16.2	15.6	16.4	16.7	14.1	14.9	14.3	15.1	15.4
6H	15.3	16.1	15.6	16.3	16.6	14.0	14.8	14.3	15.0	15.3
8H	15.3	16.0	15.6	16.3	16.5	13.9	14.7	14.3	15.0	15.2
12H	15.2	16.0	15.6	16.2	16.5	13.9	14.6	14.2	14.9	15.2
4H 2H	15.4	16.2	15.6	16.4	16.6	14.1	14.9	14.3	15.1	15.4
3H	15.2	15.9	15.5	16.2	16.5	13.9	14.6	14.2	14.9	15.2
4H	15.1	15.8	15.5	16.1	16.4	13.8	14.5	14.2	14.8	15.1
6H	15.0	15.6	15.4	15.9	16.3	13.7	14.3	14.1	14.7	15.0
8H	15.0	15.5	15.4	15.9	16.3	13.7	14.2	14.1	14.6	15.0
12H	15.0	15.5	15.4	15.9	16.3	13.7	14.2	14.1	14.5	14.9
8H 4H	15.0	15.5	15.4	15.9	16.2	13.7	14.2	14.1	14.6	14.9
6H	14.9	15.3	15.3	15.7	16.1	13.6	14.1	14.1	14.5	14.9
8H	14.9	15.3	15.3	15.7	16.1	13.6	14.0	14.1	14.4	14.9
12H	14.9	15.2	15.4	15.7	16.1	13.6	13.9	14.1	14.4	14.9
12H 4H	14.9	15.4	15.3	15.8	16.2	13.6	14.1	14.0	14.5	14.9
6H	14.8	15.2	15.3	15.7	16.1	13.6	14.0	14.0	14.4	14.8
8H	14.8	15.2	15.3	15.6	16.1	13.6	13.9	14.1	14.4	14.8

Variations with the observer position at spacings:

S = 1.0H	+ 3.1 / -11.4	+ 3.7 / - 8.4
1.5H	+ 5.8 / -11.3	+ 6.1 / - 7.5
2.0H	+ 5.1 / - 2.9	+ 2.7 / - 2.7

CIE Pub.117 Corrected 3746 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.6)

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:03-11-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:9.900 m
Remarks: 5700K

UTILIZATION FACTORS TABLE

Report number:

MANUFACTURER: DIVINITY		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,		
NAME: VIRAJ DAISY MINI ROUND	TYPE: .5W 5700K CRI90	WEIGHT:
SPECIFICATION: FULHAM 600 MA	DIMENSION: 1200*42*36.5 MM	SERIAL No.:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	87	80	76	86	80	76	85	80	76	72
0.80	94	88	85	94	88	84	92	87	84	80
1.00	99	93	90	98	93	89	96	93	89	85
1.25	103	98	94	102	97	94	100	96	93	89
1.50	106	101	98	104	100	97	102	99	96	91
2.00	108	104	101	107	103	100	104	101	99	94
2.50	110	106	103	108	105	102	105	103	100	95
3.00	112	108	105	110	107	104	107	104	102	96
4.00	114	111	109	112	109	107	108	106	105	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		


Test System: HOPOO HPG1800
 Temperature: 25.3 DEG
 Operators:
 Test Date: 03-11-2025

Test Set: 5.0 deg/s C-Gamma (TYPE C)
 Humidity: 65.0%
 Test Distance: 9.900 m
 Remarks: 5700K

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER: DIVINITY		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,		
NAME: VIRAJ DAISY MINI ROUND	TYPE: .5W 5700K CRI90	WEIGHT:
SPECIFICATION: FULHAM 600 MA	DIMENSION: 1200*42*36.5 MM	SERIAL No.:

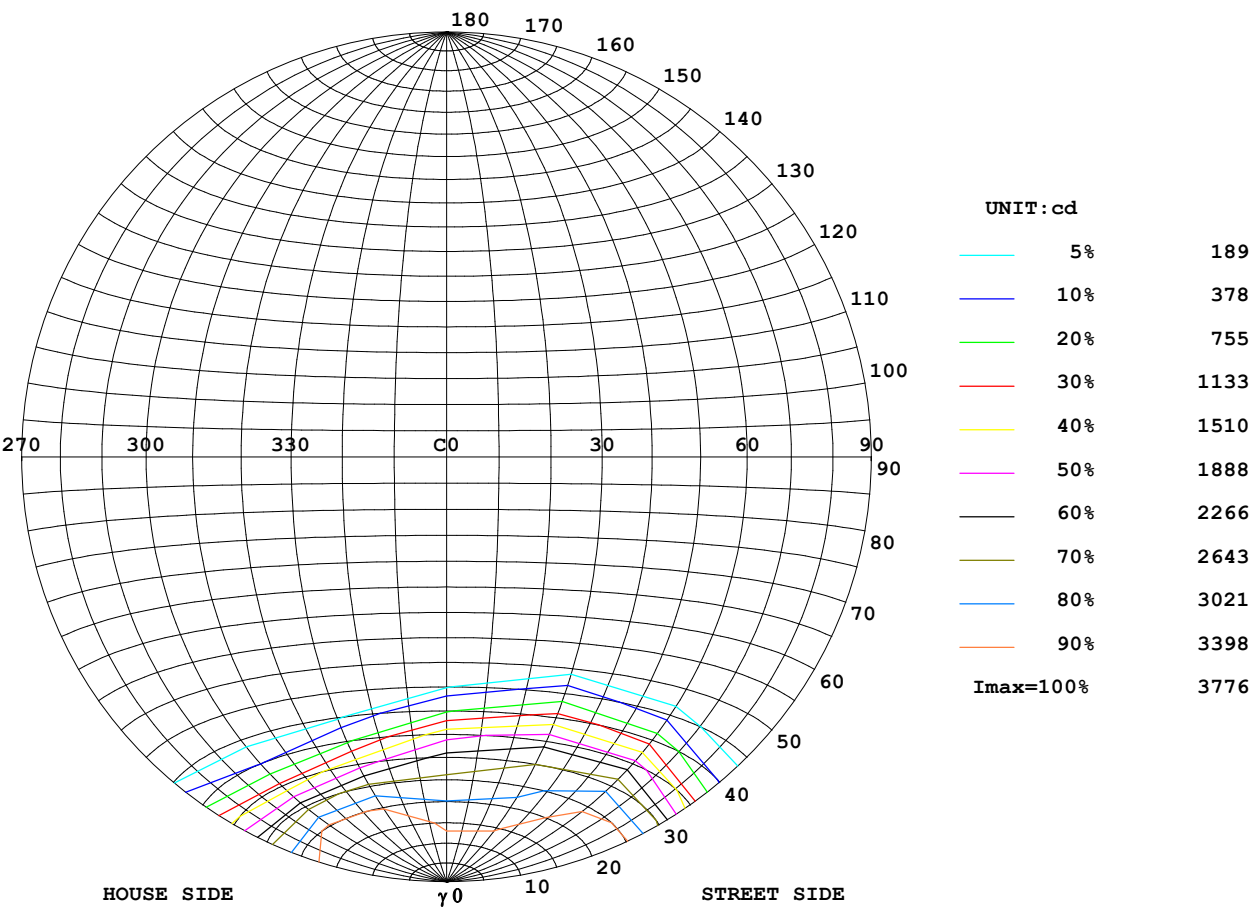

Test System:HOP00 HPG1800
Temperature:25.3DEG
Operators:
Test Date:03-11-2025



Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:9.900 m
Remarks: 5700K

ISOLUX DIAGRAM

Report number:

MANUFACTURER: DIVINITY		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,		
NAME: VIRAJ DAISY MINI ROUND	TYPE: .5W 5700K CRI90	WEIGHT:
SPECIFICATION: FULHAM 600 MA	DIMENSION: 1200*42*36.5 MM	SERIAL No.:

ILLUMINANCE AT MH=10 m,Enadir = 36.77 lx

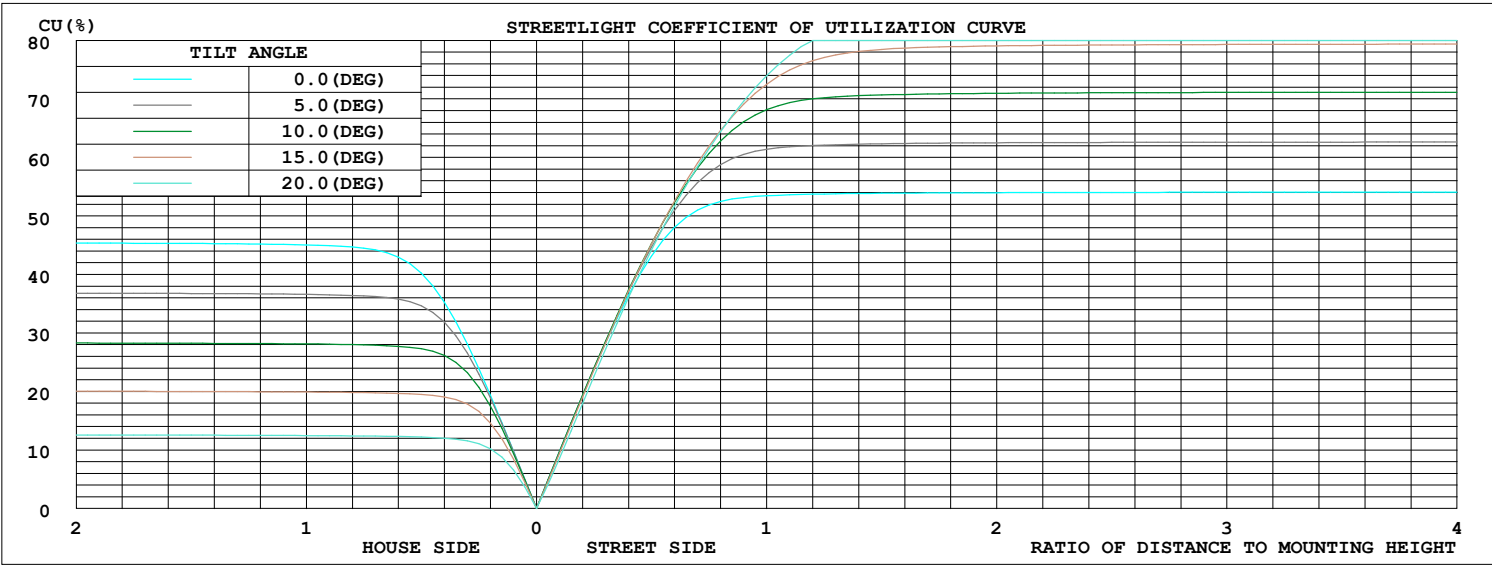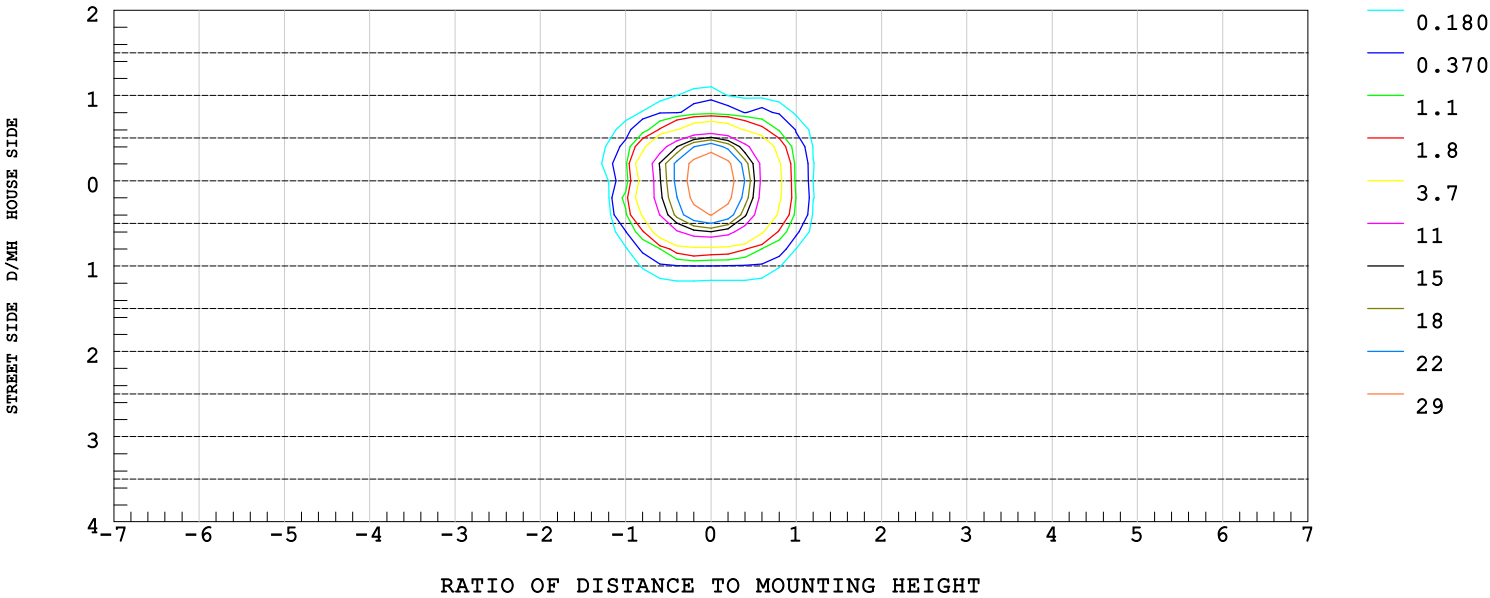


Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:03-11-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:9.900 m
Remarks: 5700K

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER: DIVINITY		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,		
NAME: VIRAJ DAISY MINI ROUND	TYPE: .5W 5700K CRI90	WEIGHT:
SPECIFICATION: FULHAM 600 MA	DIMENSION: 1200*42*36.5 MM	SERIAL No.:

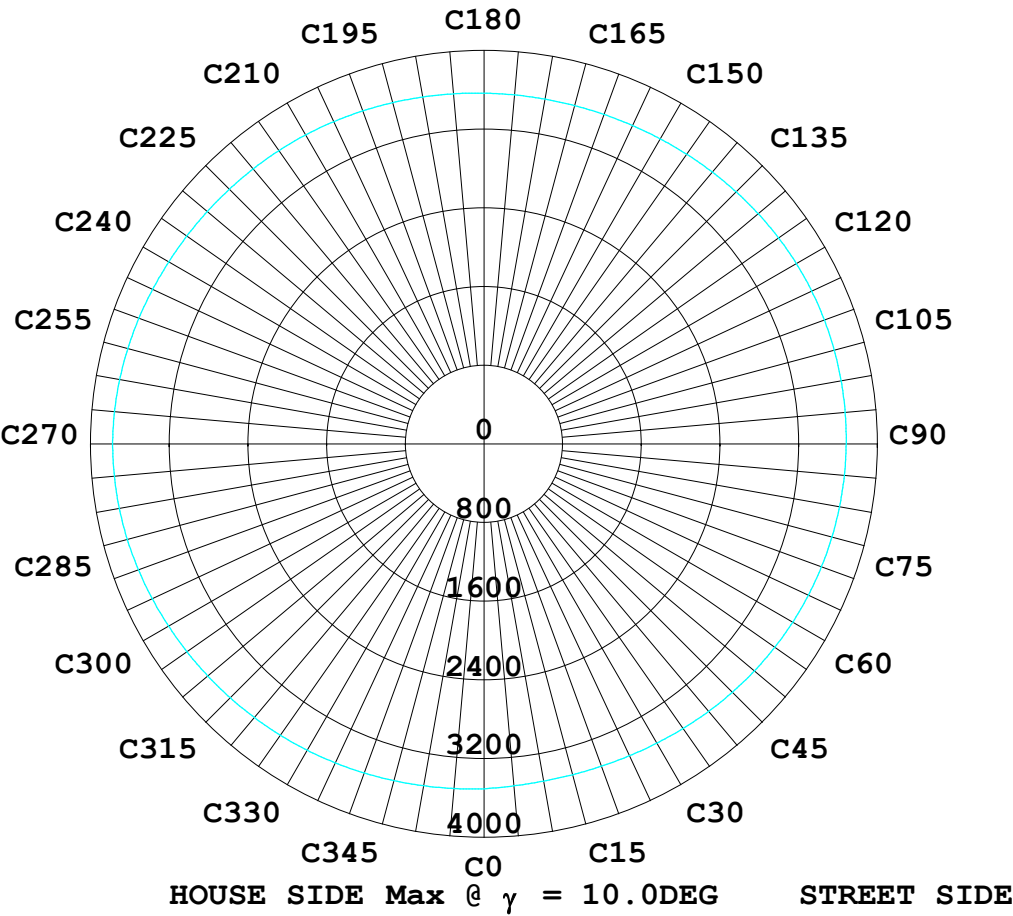

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:03-11-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:9.900 m
Remarks: 5700K

LUMINOUS DISTRIBUTION INTENSITY DATA

Report number:

MANUFACTURER: DIVINITY		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,		
NAME: VIRAJ DAISY MINI ROUND	TYPE: .5W 5700K CRI90	WEIGHT:
SPECIFICATION: FULHAM 600 MA	DIMENSION: 1200*42*36.5 MM	SERIAL No.:

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330
0.0	3677	3675	3673	3675	3673	3679	3677	3675	3673	3675	3673	3679
5.0	3624	3615	3645	3660	3668	3656	3669	3691	3704	3718	3691	3664
10.0	3506	3513	3624	3682	3668	3582	3566	3629	3702	3776	3704	3597
15.0	3324	3376	3603	3723	3638	3412	3334	3421	3576	3758	3645	3469
20.0	3028	3155	3538	3703	3503	3080	2938	3048	3213	3447	3381	3274
25.0	2716	2881	3356	3440	3159	2567	2304	2498	2532	2515	2743	2994
30.0	2398	2641	2912	2615	2571	1963	1653	1899	1569	1231	1718	2578
35.0	1723	2145	2031	1289	1689	1435	1212	1357	653	361	695	1853
40.0	709	1263	951	358	752	962	749	798	172	119	153	925
45.0	171	516	236	99.2	223	487	243	327	71.7	71.7	66.3	241
50.0	70.5	94.2	97.3	56.6	94.6	124	71.1	104	40.4	42.5	36.3	86.9
55.0	33.9	37.7	56.1	30.4	57.2	46.4	34.1	50.4	19.6	21.7	15.5	42.9
60.0	19.9	12.7	31.2	12.0	33.0	20.2	13.4	25.6	6.17	15.8	5.29	20.0
65.0	16.2	5.97	16.0	7.15	16.7	7.15	9.70	15.7	4.80	13.0	4.21	14.3
70.0	13.5	5.09	13.3	6.07	13.5	5.39	8.13	12.9	4.01	10.7	3.62	11.8
75.0	11.4	4.70	11.4	5.09	11.6	4.70	6.86	10.7	3.52	9.01	3.13	9.99
80.0	10.1	4.60	10.1	4.50	10.0	4.31	6.07	9.21	3.23	7.74	2.74	8.62
85.0	9.89	5.19	9.40	4.21	9.01	4.11	5.39	7.84	2.74	6.66	2.35	7.44
90.0	10.5	6.95	9.11	4.80	7.84	4.60	6.37	6.66	3.13	5.78	2.94	6.37

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:03-11-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:9.900 m
Remarks: 5700K