


divinity lights

VIRAJ NEO

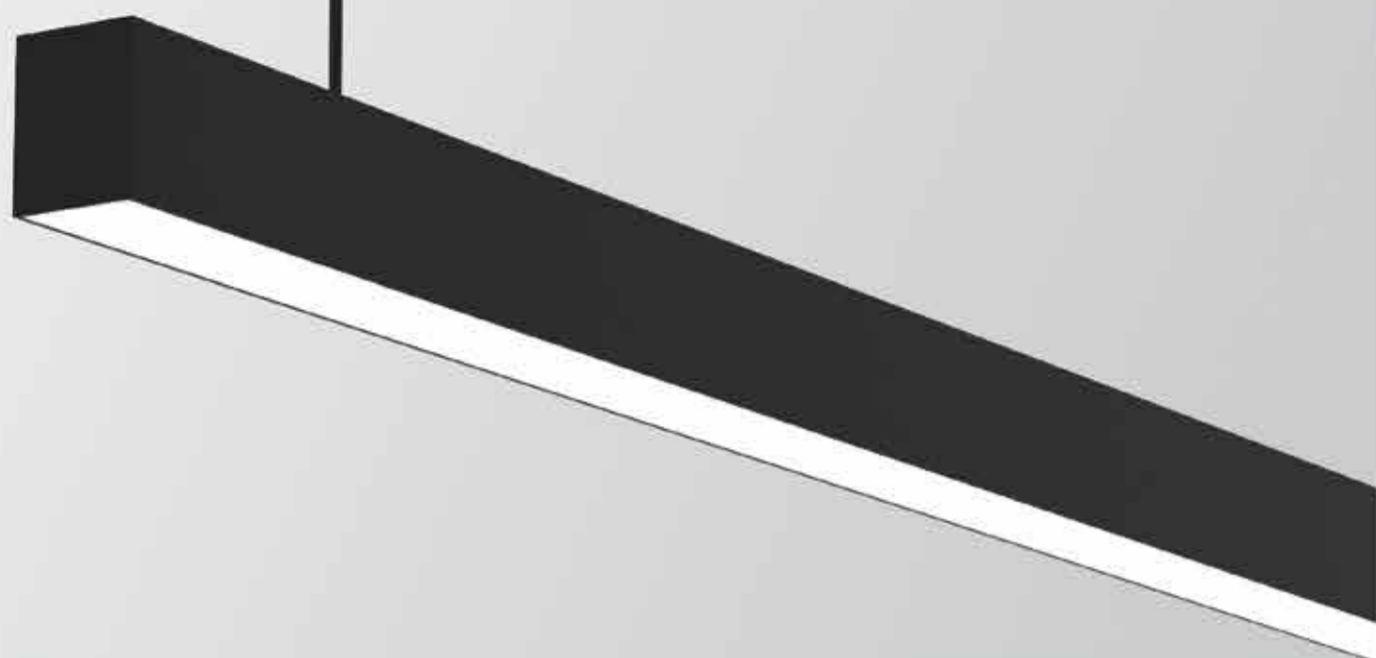

divinity lights

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable White 2700-6500K

ON-OFF/ ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM <3

PMMA + Micro Prismatic Diffuser

L70 @50,000h

Aluminium


Types

Pendant/Surface

Single Line Diagram

Pendant/Surface Mounted


Profile Code
SDL-1044

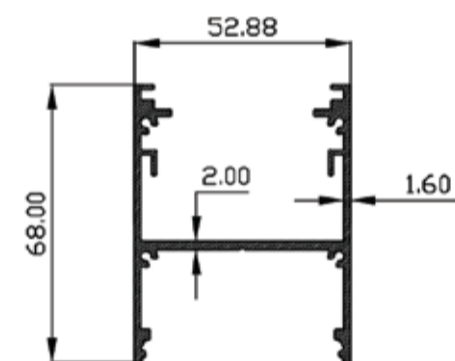

VIRAJ NEO

Viraj Neo fixture has

- Extruded Aluminium Luminaire Housing
- Premium Finish Powder coating
- High efficiency PMMA + Micro Prismatic Diffuser
- Energy efficient LED with high colour rendering
- LED PCB mounted on insert design with heat sink
- Snap-fit system and no visible screw
- Unique curved design and patterns possible
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance



CRI ≥ 90



TUNABLE WHITE

VIRAJ NEO



VIRAJ NEO (DIRECT)

System Power	Dimensions
5W	L = 300mm
10W	L = 600mm
15W	L = 900mm
20W	L = 1200mm
40W	L = 2400mm

Order Options

Distribution

Direct

CCT (Color Temperature)

3000K
4000K
5700K
Tunable 2700K-6500K



CRI

>90

Beam Angle

100.3°

Control

- ON-OFF
- ON-OFF (FLICKER FREE)
- DALI-2 DT6
- DALI-2 DT8
- DALI +



Mounting Type

Pendent

Material Color

RAL As Per Request

Photometric

