


VIRAJ 25

divinity lights

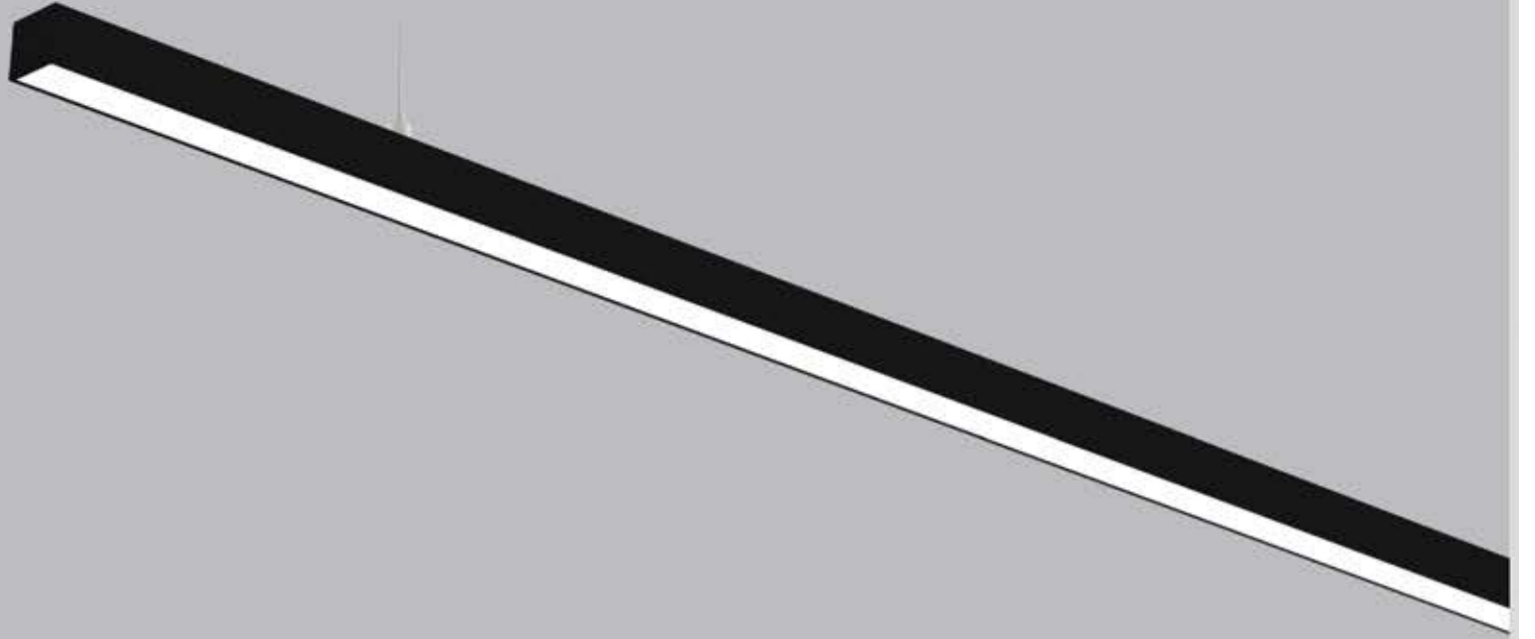

Quick Info

CRI \geq 90
 3000K/ 4000K/ 5700K
 Tunable White 2700K-6500K
 ON-OFF/ON-OFF (FLICKER FREE)
 DALI-2 DT6/ DALI-2 DT8 / DALI +
 SDCM<3
 PMMA Diffuser
 L70 @ 50,000h
 Aluminium


Types

Pendant/ Surface/ Recessed

Single Line Diagram


Pendant/ Surface Mounted

Profile Code
 SY-58




Recessed Mounted

Profile Code
 SY-72



Light Distribution


Direct



CRI \geq 90



TUNABLE
 WHITE




VIRAJ 25

Viraj 25 sleek and slim linear fixture has :

- Luminaire housing of extruded aluminium
- No visible screw
- Surface powder coated
- Snap-fit system
- LED PCB mounted on insert design with heat sink
- Bottom opening for easy maintenance
- Pendant with cable suspension
- M6 bolt for M6 fastener
- High-performance PMMA diffuser
- Energy-efficient LED

VIRAJ 25



VIRAJ 25 (DIRECT)

System Power	Dimensions
6W	L = 300mm
12W	L = 600mm
18W	L = 900mm
25W	L = 1200mm
50W	L = 2400mm

Order Options

CCT (Color Temperature)

- 3000K
- 4000K
- 5700K
- Tunable 2700K-6500K



CRI

>90

Beam Angle

98.2

Control

- ON-OFF
- ON-OFF (FLICKER FREE)
- DALI-2 DT6
- DALI-2 DT8
- DALI +



Mounting Type

- Pendent
- Surface
- Recessed

Material Color

RAL As Per Request

Photometric

