


VIRAJ H 20

divinity lights

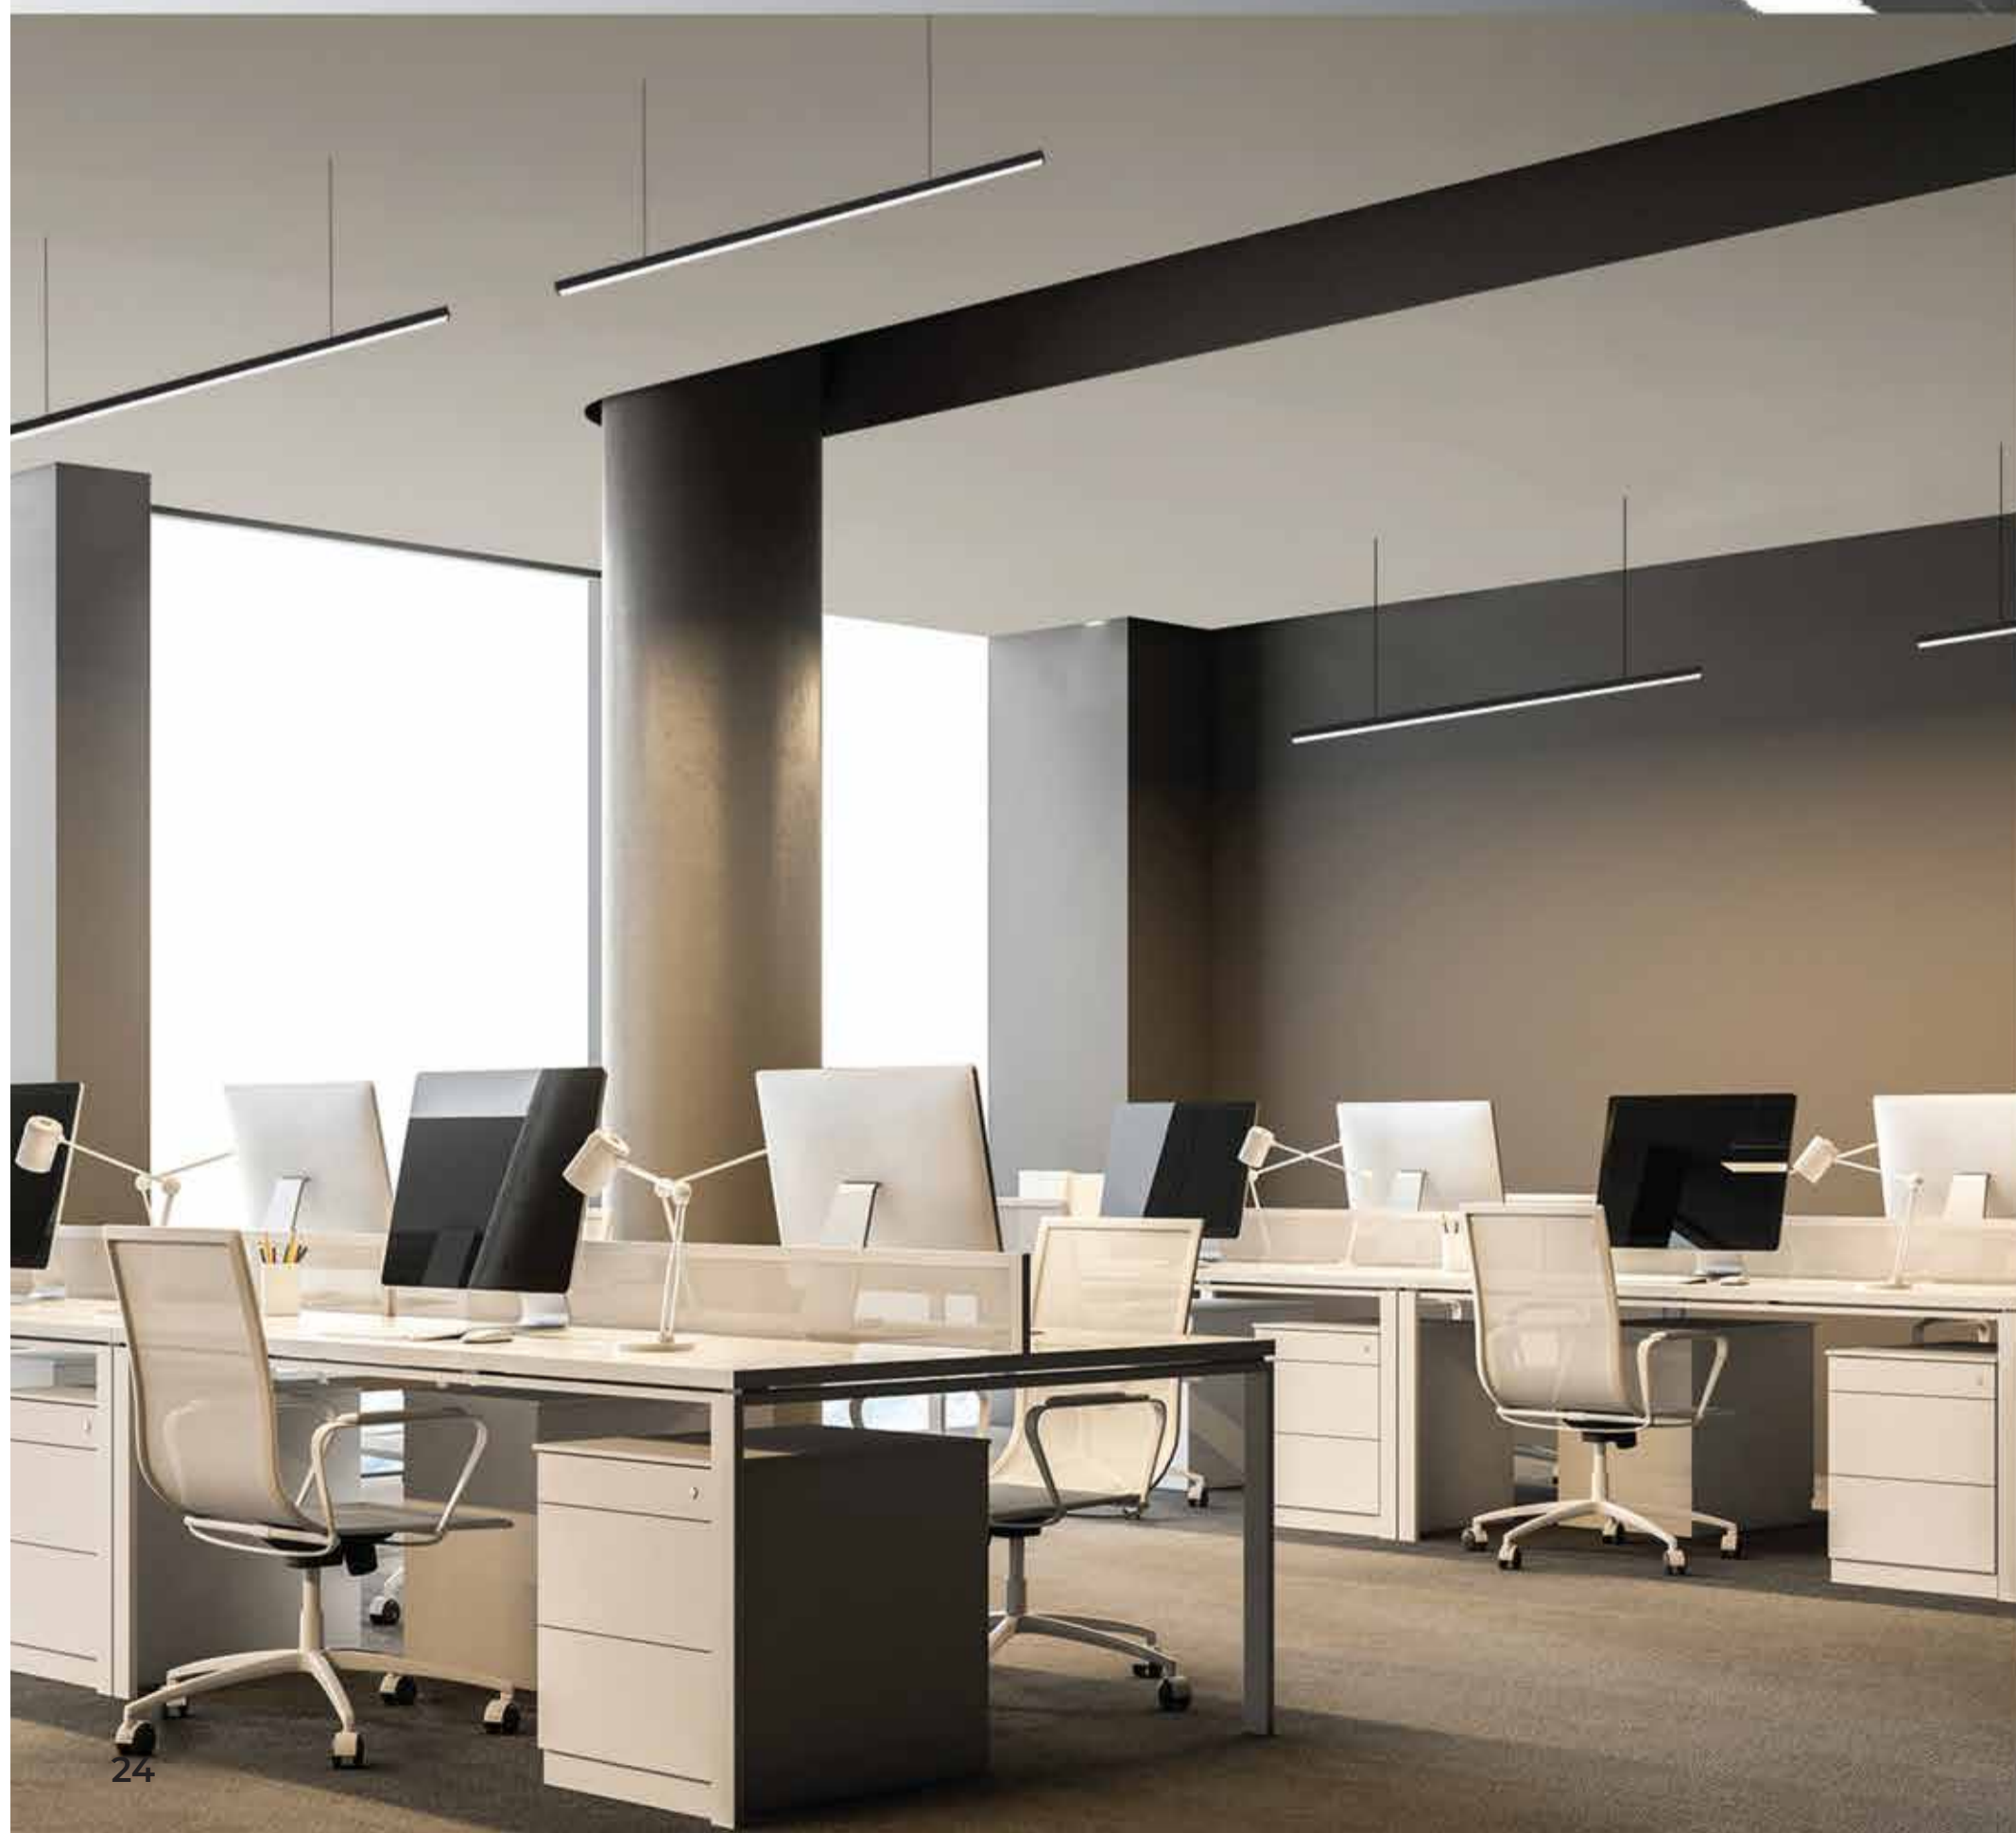

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable White 2700-6500K

ON-OFF/ ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM <3

PMMA Diffuser

L70 @50,000h

Aluminium

Types


Pendant/ Surface/ Recessed

Single Line Diagram

Pendant Mounted

Profile Code


SHF-1001



Recessed Mounted


Profile Code

SHF-1004



Light Distribution



Direct



CRI ≥ 90



TUNABLE WHITE



VIRAJ 20

Viraj 20 sleek and slim linear fixture has:

- Extruded Aluminium Luminaire Housing
- Premium Finish Powder coating
- High efficiency PMMA Diffuser
- Energy efficient LED with high colour rendering
- LED PCB mounted on insert design with heat sink
- Snap- fit system
- No visible screw
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

VIRAJ 20



VIRAJ 20 (DIRECT)

System Power	Dimensions
5W	L = 300mm W = 22mm, H = 25mm
10W	L = 600mm W = 22mm, H = 25mm
15W	L = 900mm W = 22mm, H = 25mm
20W	L = 1200mm W = 22mm, H = 25mm
40W	L = 2400mm W = 22mm, H = 25mm

Order Options

CCT (Color Temperature)

- 3000K
- 4000K
- 5700K
- Tunable 2700K-6500K



CRI

>90

Beam Angle

98.2

Control

- ON-OFF
- ON-OFF (FLICKER FREE)
- DALI-2 DT6
- DALI-2 DT8
- DALI +



Mounting Type

- Pendent
- Surface
- Recessed

Material Color

RAL As Per Request