




XANDER
BOLLARD

divinitylights



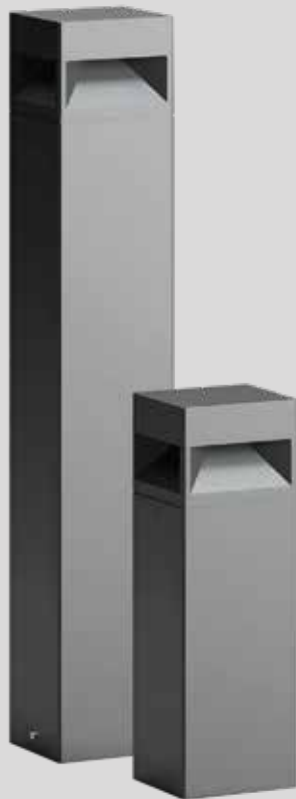

XANDER BOLLARD

Xander Bollard fixture has :

- Luminaire housing of Aluminium
- IP66, High Ingress Protection against dust & moisture
- Flicker free operation for eye protection
- Energy-efficient LED with high colour rendering
- The built quality ensures long and maintenance free service life
- Optimum for every outdoor space including society parks, streets, educational institutes, and pathways
- Garden & pathway luminaires create pleasant light distribution with a high degree of visual comfort
- LED bollards, designed to provide radially symmetric light emission
- Sustainable LED technology offers durability and optimal light output with low power consumption

Quick Info

CRI ≥ 90

2700K, 3000K, 4000K

Non-Dimmable/ Dali-Dimmable

SDCM<3

Clear Glass


L70 @50,000h

Aluminium Die-Cast

Types

Surface

Single Line Diagram

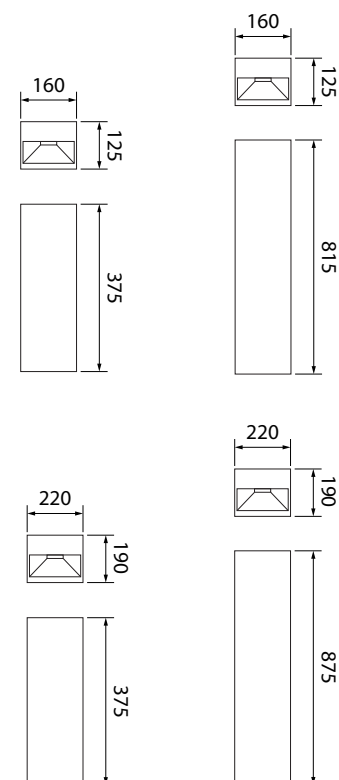

CRI ≥ 90

XANDER BOLLARD



Product Order Code	System Power	Dimensions
1853	20W	LXW=160mmX160mm H=500mm
1854	20W	LXW=160mmX160mm H=940mm
1855	30W	LXW=220mmX220mm H=565mm
1856	30W	LXW=220mmX220mm H=1065mm

Order Options

CCT (Colour Temperature)

2700K
3000K
4000K

CRI

>90

Beam Angle

N.A

Control

Non-Dimmable
Dali-Dimmable



Mounting Type

Surface

Material Colour

Grey

