


**XENIA SH145  
DUO LENS**

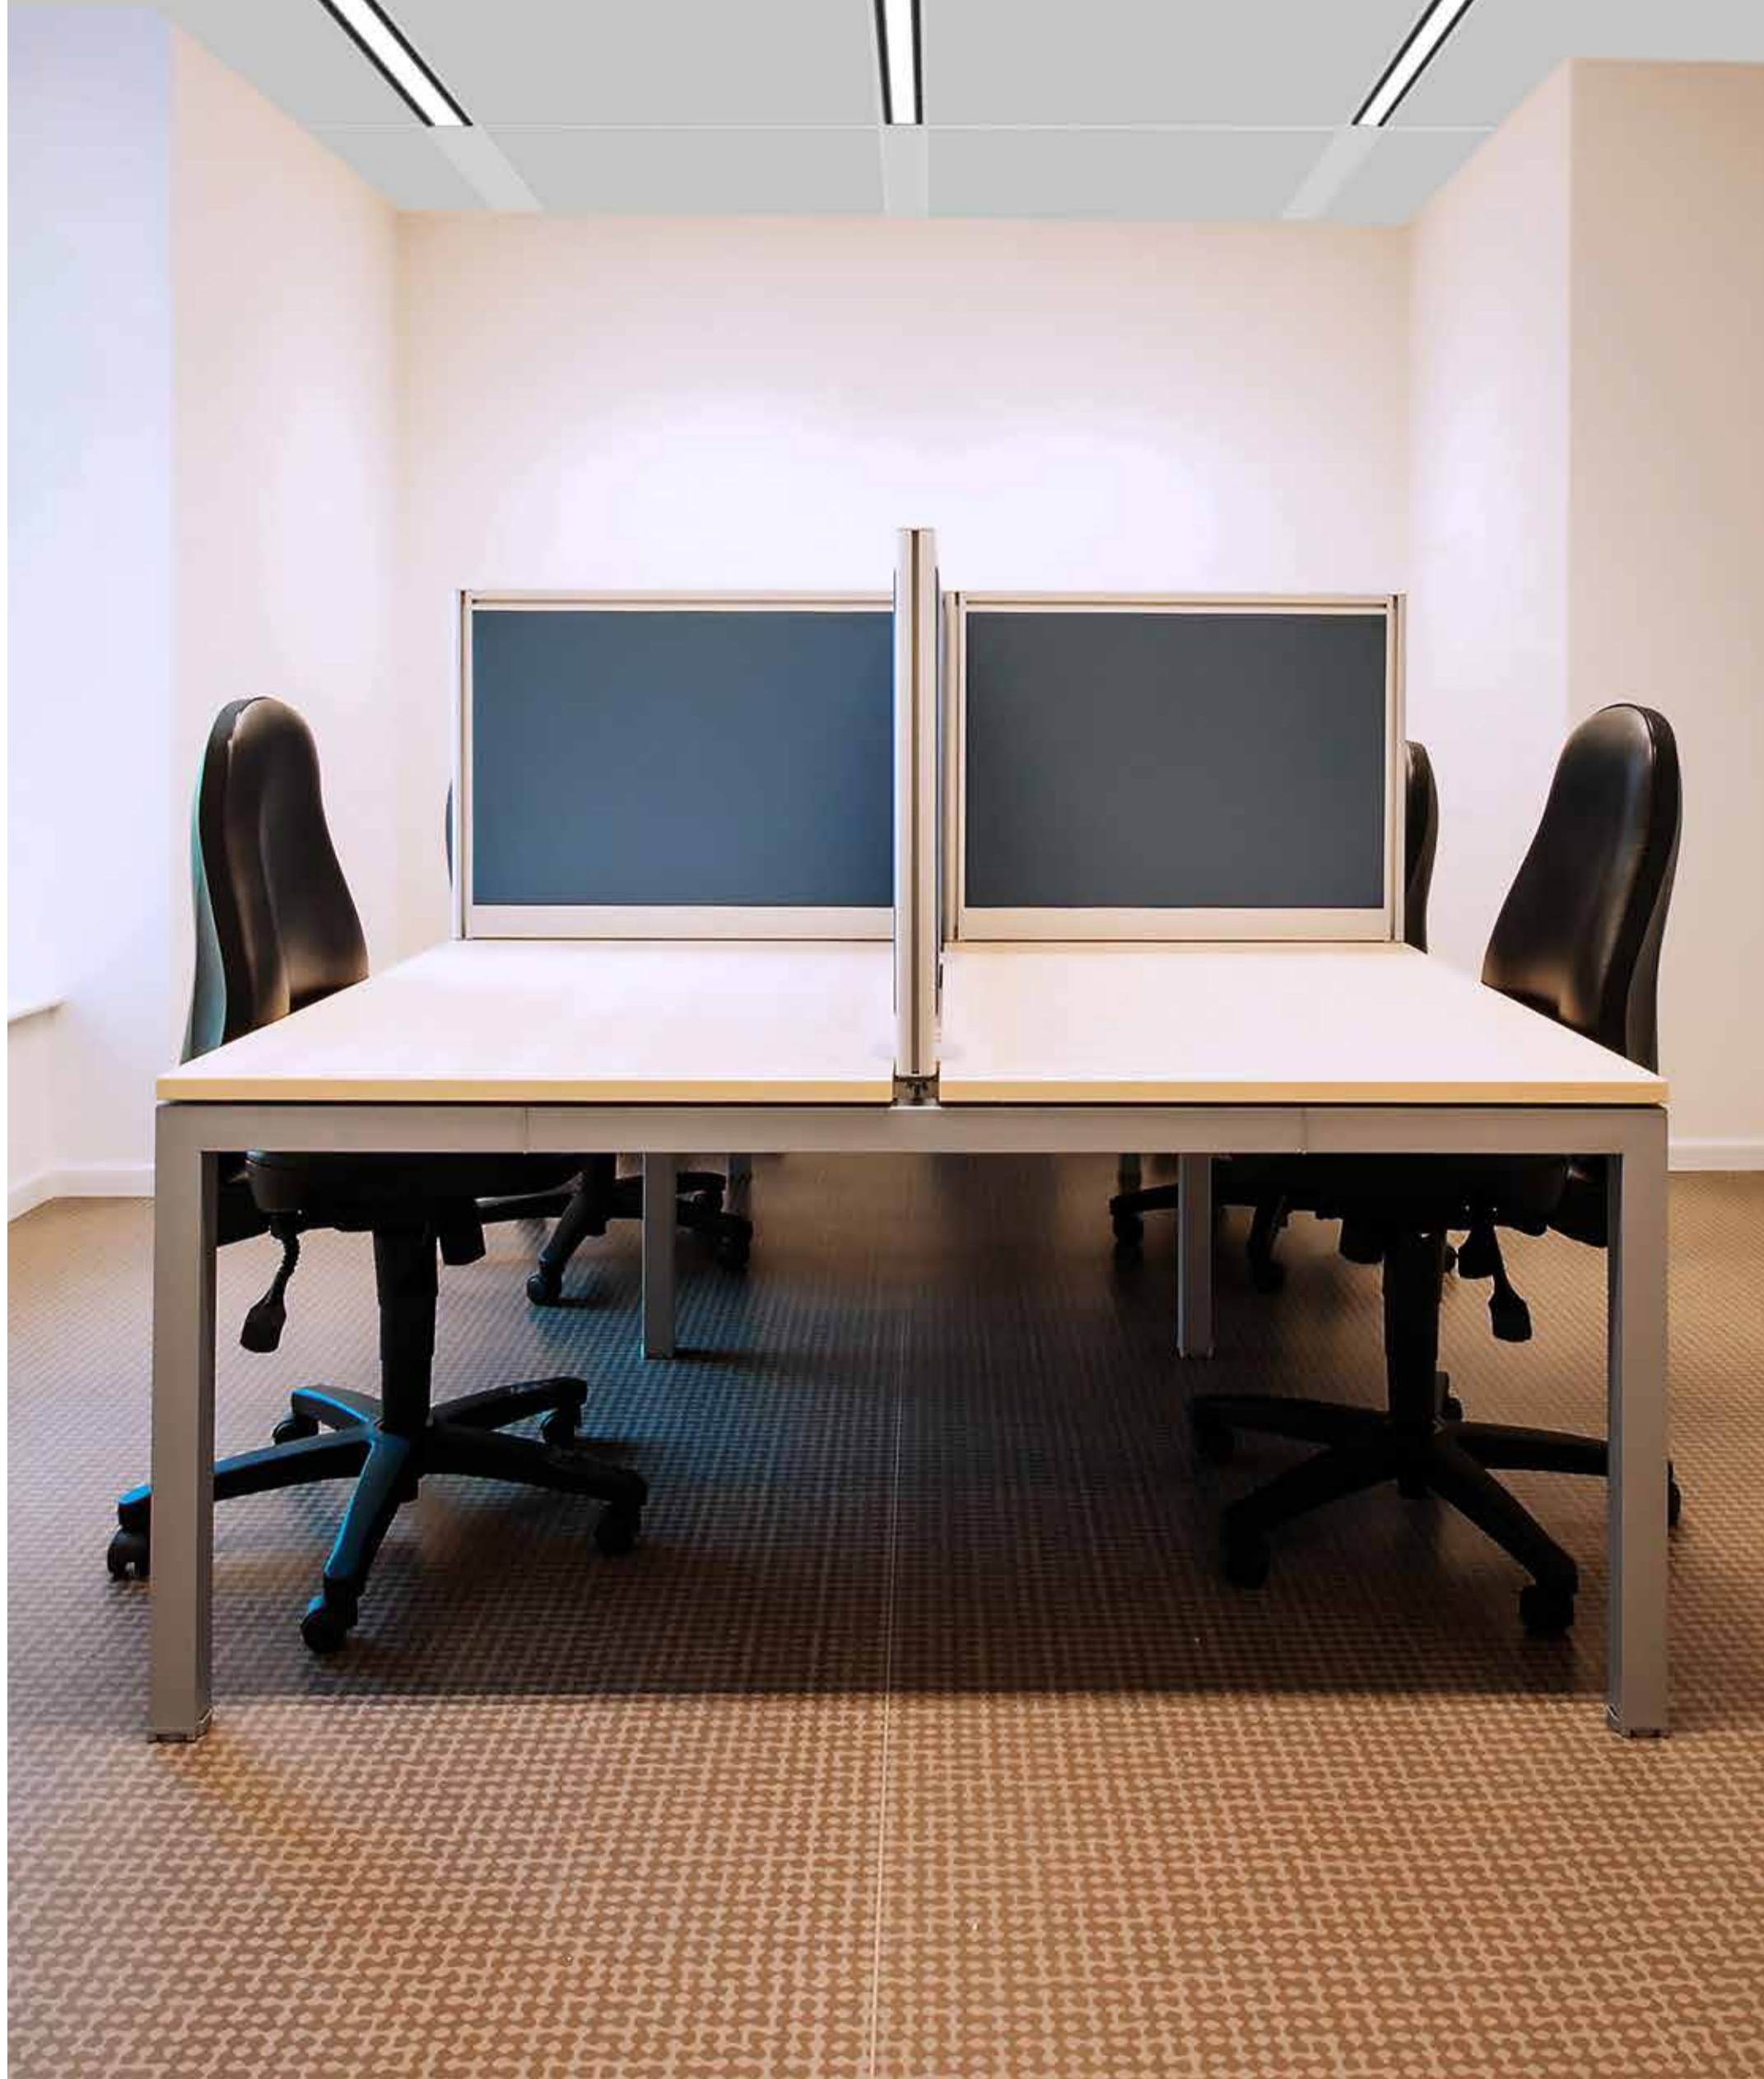

**divinity lights**

**Quick Info**

CRI ≥90

3000K/ 4000K/ 5700K

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

L70 @50,000h

Lens + Prismatic Double Diffuser





Aluminium

**Types**

Recessed with Frame in GYPSUM Ceiling

Recessed in Silhouette Techzone Ceiling

**Single Line Diagram**

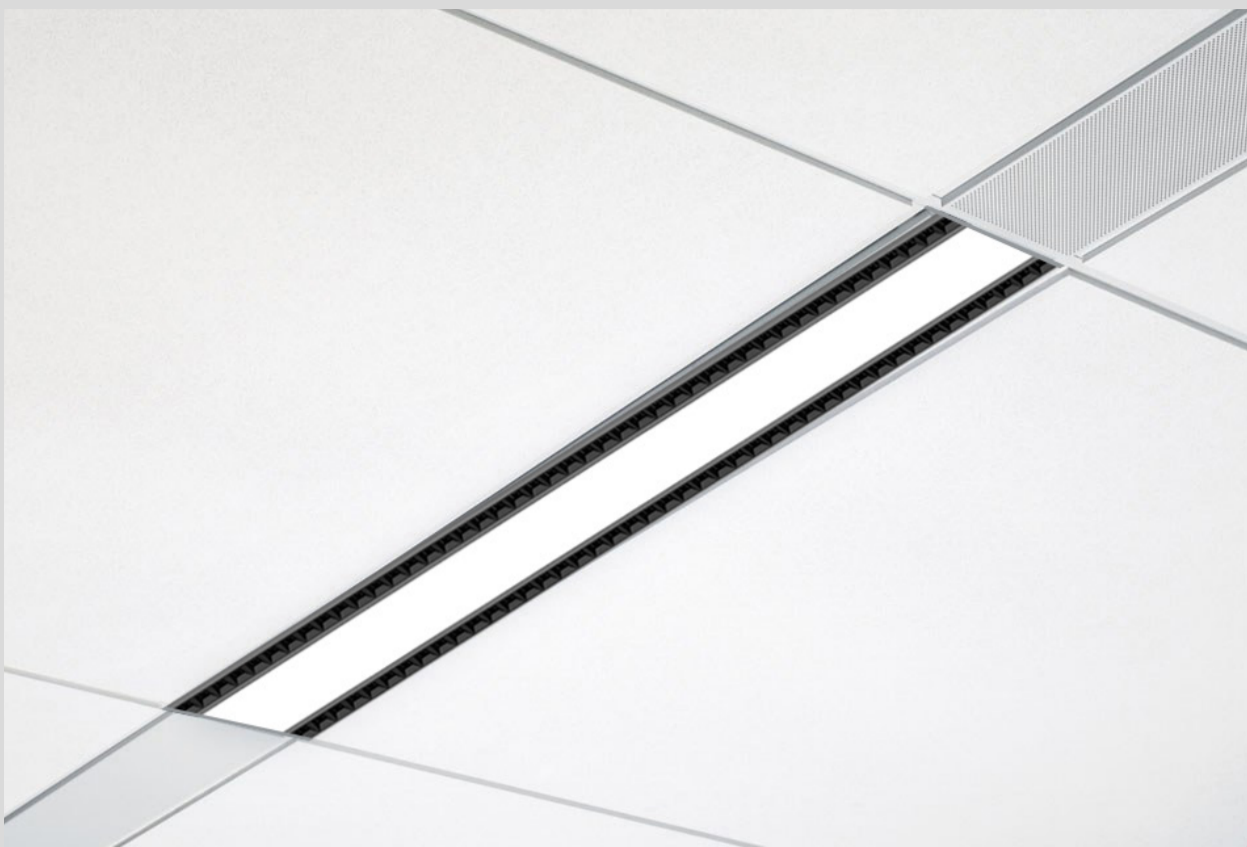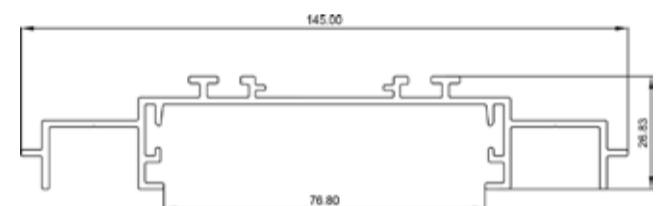

**XENIA SH145 DUO LENS**

This light features has:


- Extruded Aluminium Luminaire Housing
- Premium Finish Powder coating
- Lens + Prismatic double diffuser
- Glare control with Uniform illumination
- Energy efficient LED with high colour rendering
- LED PCB mounted on insert design with heat sink
- Snap fit system with No visible screw
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

**Color**



**Light Distribution**

Direct



CRI ≥ 90



TUNABLE  
WHITE

## XENIA SH145 DUO LENS



Xenia SH145 DUO LENS

Product Order Code	System Power	Dimension
10111-  1	30W	W=145mm, H=26.8mm
10111-  2	45W	W=145mm, H=26.8mm

### Order Options

CCT (Colour Temperature)	
3000K	<input type="radio"/> 1
4000K	<input type="radio"/> 2
5700K	<input type="radio"/> 3
TUNABLE 2700K-6700K	<input type="radio"/> 4

CRI	
>90	<input type="radio"/> 1

### Beam Angle

110°

Control	
ON-OFF	1
ON-OFF (FLICKER FREE)	2
DALI-2 DT6	3
DALI-2 DT8	4
DALI+	5




### Mounting

RECESSED

### Material Colour


Black	<input type="radio"/>	1
White	<input type="radio"/>	2
Grey	<input type="radio"/>	3

## Accessories

Product Order Code	Accessories Name	Accessories Image
10111- <input checked="" type="radio"/> <input type="radio"/> <input type="radio"/> <input type="checkbox"/> 1	LED PCB	
10111-2	Suspension Wire	
10111-3	24° Lens	
10111-4	50° Lens	
10111-5	50°X50° Lens	
10111-6	PMMA Diffuser	
10111-7	Micro Prismatic Diffuser	
10111-8	Profile Connector	
10111-9	Profile Endcap	

## Order Options

### CCT (Colour Temperature)

- 3000K  1
- 4000K  2
- 5700K  3
- Tunable White 2700K-6500K   4

### CRI

- >90  1

### Material Colour

- Black  1
- White  2
- Grey  3