

**XTO CURVE
LINEAR**



XTO LINEAR LENS

divinity lights




Lens

Micro Prismatic
Diffuser

**XTO LINEAR
LENS + DIFFUSER**



divinity lights

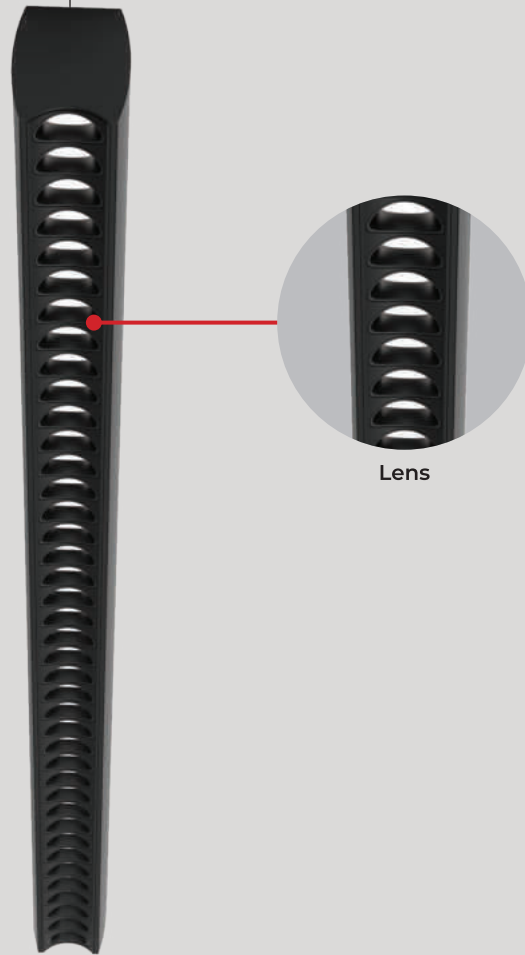

Quick Info

CRI \geq 80/ 90/ 95

3000K/ 4000K/ 5700K/ 6500K

Tunable White 2700K-6500K

Up to 100lm/W

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 / DALI-2 DT8 / D4i / DALI +

POE (Power Over Ethernet)

SDCM<3

Lens

L70 @ 50,000h


Aluminium

Types


Pendant/ Surface

Single Line Diagram


XTO 20




XTO 25




XTO 30





XTO 35



XTO 40



XTO 45



XTO CURVE LINEAR

XTO Curve Linear has:


- Range of size/angle design solutions
- Surface powder coated
- Luminaire housing of extruded aluminium
- LED PCB mounted on insert design with heat sink
- Bottom opening for easy maintenance
- Modular design concept
- UGR less than 9
- Micro-structure & anti-glare optical lens design
- Uniform illumination
- Energy-efficient LED with color rendering

Colours



Light Distribution

Direct Direct-Indirect



CRI \geq 80/ 90/ 95



TUNABLE
WHITE

XTO CURVE LINEAR



XTO CURVE LINEAR (DIRECT)

Product Order Code	System Power	Dimensions
1019-1□●●■□◇81	8W	L = 300mm
1019-1□●●■□◇82	16W	L = 600mm
1019-1□●●■□◇83	24W	L = 900mm
1019-1□●●■□◇84	35W	L = 1200mm
1019-1□●●■□◇85	70W	L = 2400mm

XTO CURVE LINEAR (DIRECT-INDIRECT)

Product Order Code	System Power	Dimensions
1019-▼□●●■□◇81	15W	L = 300mm
1019-▼□●●■□◇82	30W	L = 600mm
1019-▼□●●■□◇83	40W	L = 900mm
1019-▼□●●■□◇84	60W	L = 1200mm
1019-▼□●●■□◇85	120W	L = 2400mm

Order Options

Distribution	
Direct	1
Direct-Indirect	
Up-50% / Down-50%	2
Up-30% / Down-70%	3
Up-70% / Down-30%	4
Up-20% / Down-80%	5
Up-80% / Down-20%	6

Lumen Type	
Low	1
High	2

CCT (Colour Temperature)	
3000K	1
4000K	2
5700K	3
6500K	4
Tunable White 2700K-6500K	5

CRI	
>80	1
>90	2
>95	3

Beam Angle	
67°	

Control		
ON-OFF		1
ON-OFF (FLICKER FREE)		2
DALI-2		3
DALI-2 DT8		4
DALI +		5
D4i		6
POE (Power Over Ethernet)		7

Mounting Type	
Pendant	1
Surface	2

Material Colour		
Black		1
White		2
Grey		3

Reflector Option	
XTO 20 (20mm Lens)	1
XTO 25 (25mm Lens)	2
XTO 30 (30mm Lens)	3
XTO 35 (35mm Lens)	4
XTO 40 (40mm Lens)	5
XTO 45 (45mm Lens)	6

Optics	
Lens	1
Lens + Micro Prismatic Diffuser	2

Accessories


Product Order Code	Accessories Name	Accessories Image
1019-01 <input type="checkbox"/> <input checked="" type="radio"/> <input type="radio"/>	LED PCB	
1019-02	Suspension Wire	
1019-03 <input checked="" type="checkbox"/>	Black + Black Lens	
1019-04 <input checked="" type="checkbox"/>	Black + Silver Lens	
1019-05 <input checked="" type="checkbox"/>	Chrome + Black Lens	
1019-06 <input checked="" type="checkbox"/>	Black + Gold Lens	
1019-07	Micro Prismatic Diffuser	
1019-08	Profile Connector	
1019-09 <input type="checkbox"/>	Profile Endcap	

Order Options

Lumen Type

Low	1
High	2

CCT (Colour Temperature)

3000K	1
4000K	2
5700K	3
6500K	4
Tunable White 2700K-6500K 	5

CRI

>80	1
>90	2
>95	3

Material Colour

Black <input checked="" type="radio"/>	1
White <input type="radio"/>	2
Grey <input type="radio"/>	3

Reflector Option

XTO 20 (20mm Lens)	1
XTO 25 (25mm Lens)	2
XTO 30 (30mm Lens)	3
XTO 35 (35mm Lens)	4
XTO 40 (40mm Lens)	5
XTO 45 (45mm Lens)	6