

XTO RECTANGLE

Direct | Pendant



XTO RECTANGLE is customised Rectangular Luminaire in a sleek design and with Extruded aluminium housing and with premium powder coating finish.



Powered by high quality LED's with a binning tolerance of ≤ 3 SDCM and CRI ≥ 90 . The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long term reliability. High efficiency Micro structure & antiglare optical lens design with uniform illumination and UGR less than 16. Range of Reflector width/size and angle design available.

FOR 2400 X 1200MM RECTANGLE

Available in Rectangle shape with length 2400mm and width 1200mm, this fixture is crafted for direct and uniform light distribution making it ideal for professional applications.

Customisations in RAL finish, Reflector finish, Wattages, and Dimensions available as per request to enhance installation and functionality.

Single Line Diagram

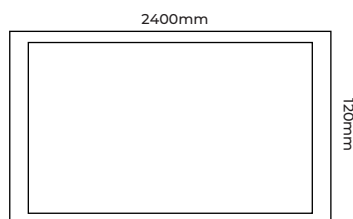

XTO RECTANGLE



Quick Info

Mounting Type

Pendant

Material Colour

Customize RAL available

Protection mode

IP40

Driver Details

ON/OFF/, DALI-2 DT6 / DALI-2 DT8/ DALI +

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6500K

CRI- ≥ 90

Life Span - L70@50000h

MacAdam - ≤ 3 SDCM

Beam Angle

67°

Optics

Lens

Efficacy

3000K- 103.65

4000K- 117.6

5700K- 135.9

Tunable White 2700K-6500K- 117.6

Electrical

Wattage - 105W

Input Voltage- 220-240 VAC

Physical Dimensions

LXW- 2400mmX1200mm

Height- 70mm