

**XTO
ROUND RING**

divinity lights





XTO ROUND RING

XTO Round Ring has :

- Luminaire housing of extruded aluminium
- Range of sizes and angle designs
- Application requirements in different fields
- Surface powder coated
- LED PCB mounted on insert design with heat sink
- Bottom opening for easy maintenance
- Pendant with cable suspension
- M6 bolt for M6 fastener
- Modular design with uniform illumination
- UGR less than 9
- Microstructure anti-glare optical lens
- Energy-efficient LED with color rendering


Quick Info

- CRI ≥ 90
- 3000K/ 4000K/ 5700K
- Tunable white (2700K-6500K)
- ON-OFF/ON-OFF (FLICKER FREE)
- DALI-2 DT6 / DALI-2 DT8/ DALI+
- SDCM<3
- Lens
- L70 @50,000h
- Aluminium


Types

Pendant/ Surface


Single Line Diagram

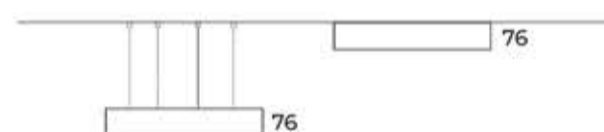


XTO ROUND 220




XTO ROUND 310




XTO ROUND 460



XTO ROUND 660




XTO ROUND 910



Light Distribution

Direct Direct-Indirect



CRI ≥ 90



TUNABLE
WHITE

XTO ROUND RING



XTO ROUND RING (DIRECT)

System Power	Dimensions
25W	Dia= 220mm, H= 76mm
35W	Dia= 310mm, H= 76mm
40W	Dia= 460mm, H= 76mm
50W	Dia= 660mm, H= 76mm
60W	Dia= 910mm, H= 76mm

XTO ROUND RING (DIRECT-INDIRECT)

System Power	Dimensions
25W	Dia= 220mm, H= 76mm
35W	Dia= 310mm, H= 76mm
40W	Dia= 460mm, H= 76mm
50W	Dia= 660mm, H= 76mm
60W	Dia= 910mm, H= 76mm

Order Options

Distribution

- Direct
- Indirect
- Up-50% / Down-50%
- Up-30% / Down-70%
- Up-70% / Down-30%
- Up-20% / Down-80%
- Up-80% / Down-20%

CCT (Color Temperature)

- 3000K
- 4000K
- 5700K
- Tunable 2700K-6500K



CRI

>90

Beam Angle

- 80°
- 100°

Control

- ON-OFF
- ON-OFF (FLICKER FREE)
- DALI-2 DT6
- DALI-2 DT8
- DALI +



Mounting Type

- Pendent
- Surface

Material Color

RAL As Per Request

XTO Reflector Option

- XTO 20 (20mm Lens)
- XTO 25 (25mm Lens)
- XTO 30 (30mm Lens)
- XTO 35 (35mm Lens)
- XTO 40 (40mm Lens)
- XTO 45 (45mm Lens)

Photometric Details

