


XTO ZORRO

divinity lights



**XTO ZORRO
LINEAR LENS**

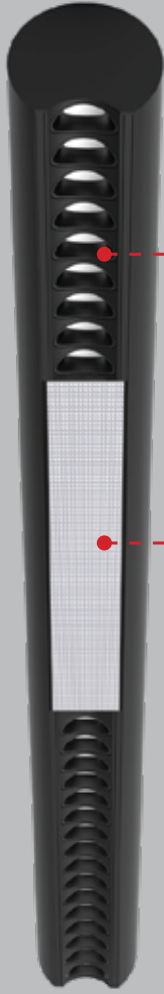

Lens

Micro Prismatic
Diffuser

**XTO ZORRO
LENS + DIFFUSER**



divinity lights

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable White 2700K-6500K

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI +

SDCM<3

Lens

L70 @ 50,000h


Aluminium

Types


Pendant/ Surface

Single Line Diagram


XTO 20




XTO 25




XTO 30




XTO 35



XTO 40



XTO 45




Colours



Light Distribution

Direct

Direct-Indirect



CRI ≥ 90



TUNABLE WHITE

XTO ZORRO

XTO Zorro has:

- Extruded Aluminium Luminaire Housing
- Premium Finish Powder coating
- Range of size/angle design solutions
- Modular design concept
- Micro structure & antiglare optical lens design
- Uniform illumination
- UGR less than 9
- Snap fit system with No visible screw
- Energy efficient LED with high colour rendering
- LED PCB mounted on insert design with heat sink
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

XTO ZORRO



XTO ZORRO (DIRECT)

Product Order Code	System Power	Dimensions
1020-1□●●■▱◇Λ1	7W	L = 300mm
1020-1□●●■▱◇Λ2	14W	L = 600mm
1020-1□●●■▱◇Λ3	21W	L = 900mm
1020-1□●●■▱◇Λ4	28W	L = 1200mm
1020-1□●●■▱◇Λ5	56W	L = 2400mm


XTO ZORRO (DIRECT-INDIRECT)

Product Order Code	System Power	Dimensions
1020-▼□●●■1◇Λ1	10W	L = 300mm
1020-▼□●●■1◇Λ2	20W	L = 600mm
1020-▼□●●■1◇Λ3	30W	L = 900mm
1020-▼□●●■1◇Λ4	50W	L = 1200mm
1020-▼□●●■1◇Λ5	100W	L = 2400mm

Order Options

Distribution	▼
Direct	1
Direct-Indirect	
Up-50% / Down-50%	2
Up-30% / Down-70%	3
Up-70% / Down-30%	4
Up-20% / Down-80%	5
Up-80% / Down-20%	6
CCT (Colour Temperature)	●
3000K	1
4000K	2
5700K	3
Tunable White 2700K-6500K	4
CRI	●
>90	1
Beam Angle	
67°	
Control	■
ON-OFF	⏻ 1
ON-OFF (FLICKER FREE)	👁️ 2
DALI-2 DT6	DALI 3
DALI-2 DT8	DT8 4
DALI +	DALI+ 5
Mounting Type	▱
Pendant	1
Surface	2
Material Colour	⦿
Black	● 1
White	○ 2
Grey	● 3
Reflector Option	◇
XTO 20 (20mm Lens)	1
XTO 25 (25mm Lens)	2
XTO 30 (30mm Lens)	3
XTO 35 (35mm Lens)	4
XTO 40 (40mm Lens)	5
XTO 45 (45mm Lens)	6
Optics	Λ
Lens	1
Lens + Micro Prismatic Diffuser	2

Accessories

Product Order Code	Accessories Name	Accessories Image
1020-01 	LED PCB	
1020-02	Suspension Wire	
1020-03 	Black + Black Lens	
1020-04 	Black + Silver Lens	
1020-05 	Chrome + Black Lens	
1020-06 	Black + Gold Lens	
1020-07	Micro Prismatic Diffuser	
1020-08	Profile Connector	
1020-09 	Profile Endcap	

Order Options

CCT (Colour Temperature) 	
3000K	1
4000K	2
5700K	3
Tunable White 2700K-6500K 	4
CRI 	
>90	1
Material Colour 	
Black 	1
White 	2
Grey 	3
Reflector Option 	
XTO 20 (20mm Lens)	1
XTO 25 (25mm Lens)	2
XTO 30 (30mm Lens)	3
XTO 35 (35mm Lens)	4
XTO 40 (40mm Lens)	5
XTO 45 (45mm Lens)	6