


**XTREME 145
ANTIGLARE**

divinity lights

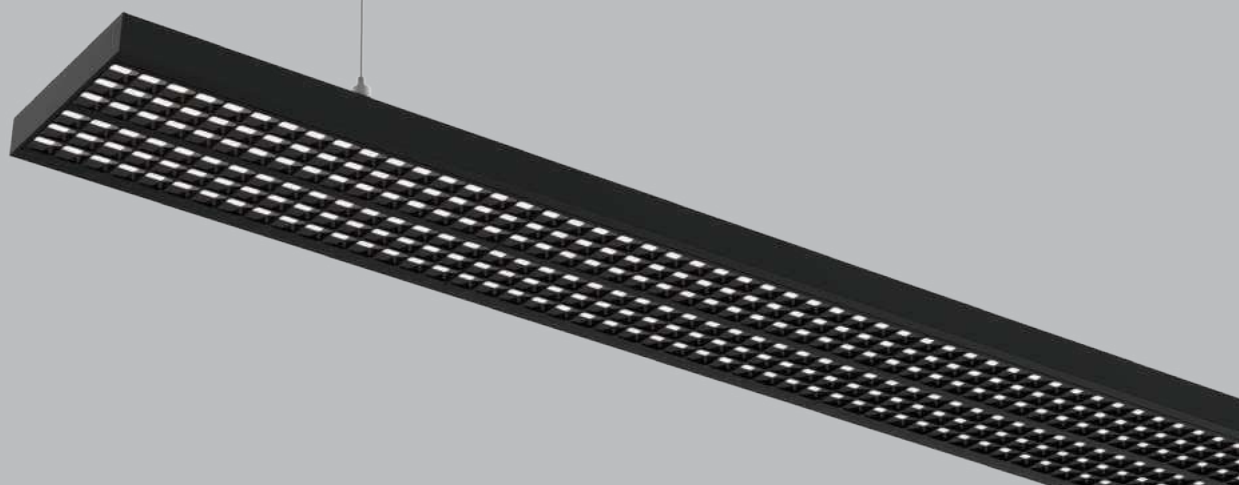

divinity lights

Quick Info

CRI ≥ 80/ 90/ 95

3000K/ 4000K/ 5700K/ 6500K

Tunable White 2700K-6500K

Up to 100lm/W

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 / DALI-2 DT8 / D4i / DALI +

POE (Power Over Ethernet)

SDCM<3

Antiglare Reflector

L70 @ 50,000h




Aluminium

Types

Pendant/ Recessed

Single Line Diagram

Pendant/ Recessed

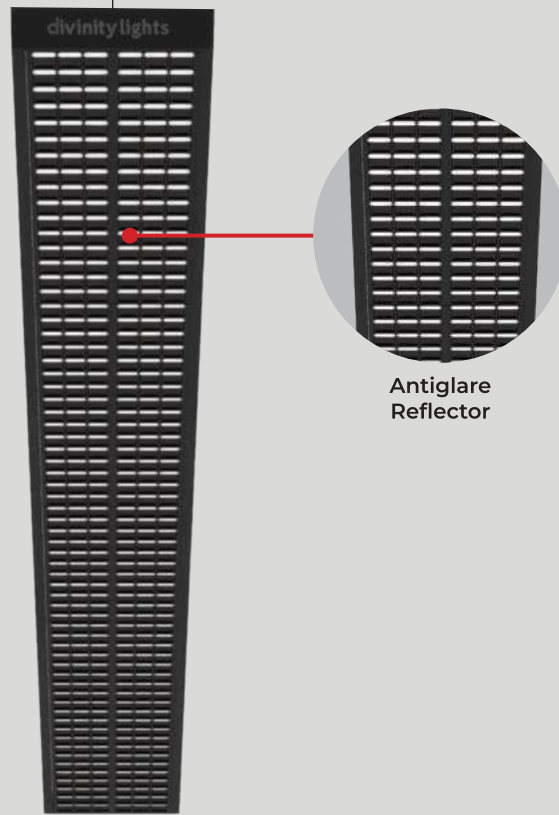

XTREME 145 ANTIGLARE

Xtreme 145 Antiglare has:


- Luminaire housing of extruded aluminium
- A new concept on Louver Technology with high glare control
- Visual comfort with panache
- Uniform illumination
- Energy-efficient LED with color rendering
- Available in Matt Black, Matt White, Silver & Gun Metal Glossy
- Bottom opening for easy maintenance
- Pendant with cable suspension

Colours



Light Distribution

Direct Direct-Indirect



CRI ≥ 80/ 90/ 95



TUNABLE
WHITE

XTREME 145 ANTIGLARE



XTREME 145 ANTIGLARE (DIRECT)

Product Order Code	System Power	Dimensions
1024-1	25W	L = 600mm W=145mm, H = 27mm
1024-1	50W	L = 1200mm W=145mm, H = 27mm
1024-1	100W	L = 2400mm W=145mm, H = 27mm

XTREME 145 ANTIGLARE (DIRECT-INDIRECT)

Product Order Code	System Power	Dimensions
1024-	35W	L = 600mm W=145mm, H = 27mm
1024-	70W	L = 1200mm W=145mm, H = 27mm
1024-	140W	L = 2400mm W=145mm, H = 27mm

Order Options

Distribution	
Direct	1
Direct-Indirect	
Up-50% / Down-50%	2
Up-30% / Down-70%	3
Up-70% / Down-30%	4
Up-20% / Down-80%	5
Up-80% / Down-20%	6

Lumen Type	
Low	1
High	2

CCT (Colour Temperature)	
3000K	1
4000K	2
5700K	3
6500K	4
Tunable White 2700K-6500K	5

CRI	
>80	1
>90	2
>95	3









Beam Angle	
110°	

Control		
ON-OFF		1
ON-OFF (FLICKER FREE)		2
DALI-2		3
DALI-2 DT8		4
DALI +		5
D4i		6
POE (Power Over Ethernet)		7

Mounting Type	
Pendant	1
Recessed	2

Material Colour		
Black		1
White		2
Grey		3

Accessories


Product Order Code	Accessories Name	Accessories Image
1024-01 <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	LED PCB	
1024-02	Suspension Wire	
1024-03	Matt Black Antiglare	
1024-04	Matt White Antiglare	
1024-05	Silver Antiglare	
1024-06	Gun Metal Glossy Antiglare	
1024-07	Profile Connector	
1024-08 <input type="checkbox"/>	Profile Endcap	

Order Options

Lumen Type

- Low 1
- High 2

CCT (Colour Temperature)

- 3000K 1
- 4000K 2
- 5700K 3
- 6500K 4
- Tunable White 2700K-6500K  5

CRI

- >80 1
- >90 2
- >95 3

Material Colour

- Black 1
- White 2
- Grey 3