


**XTREME 145
DUO (DAISY-S)**

divinity lights

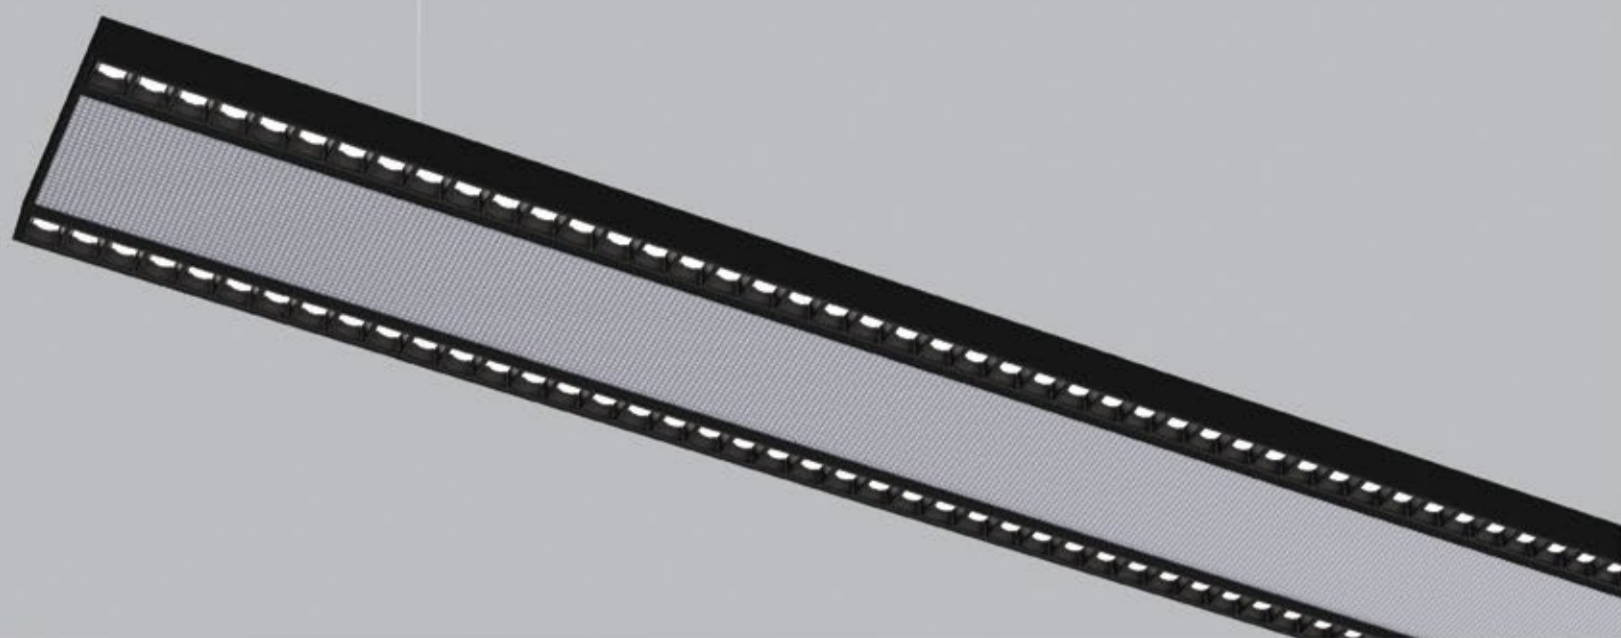

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable White 2700-6500K

ON-OFF/ ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM <3

Lens + Micro Prismatic Diffuser

L70 @50,000h

Aluminium

Types




Pendant/ Recessed

Single Line Diagram

Pendant/ Recessed Mounted

Profile Code

SY-115

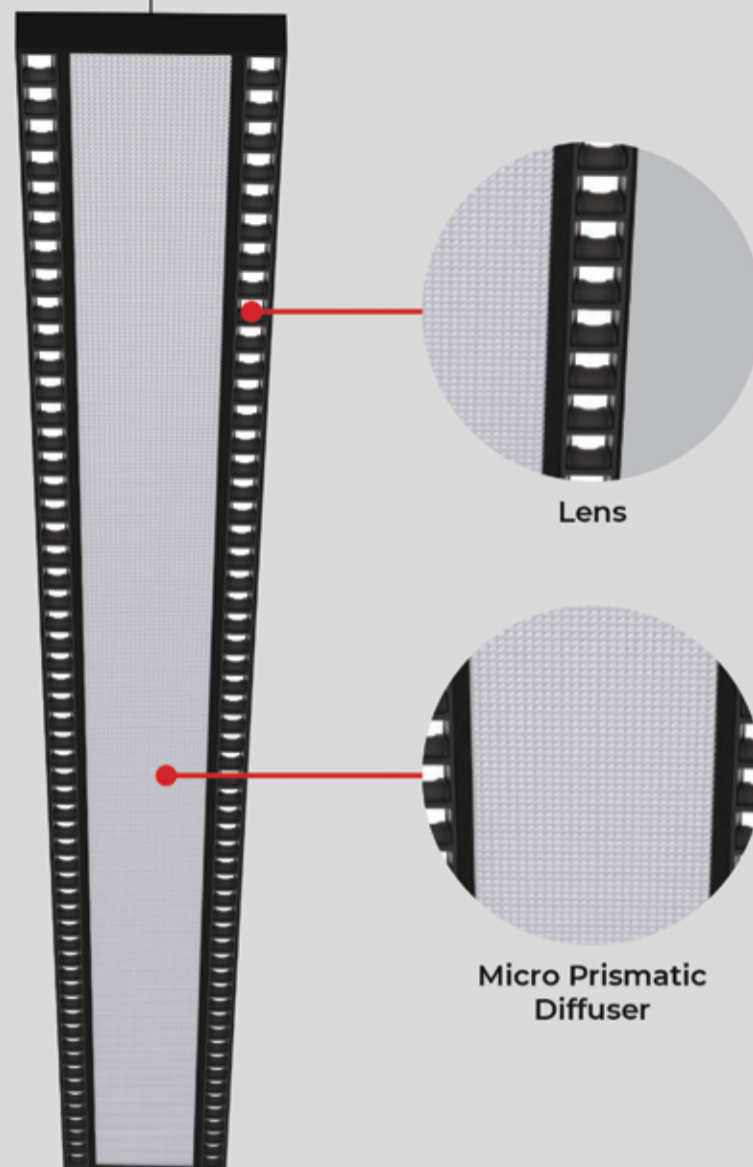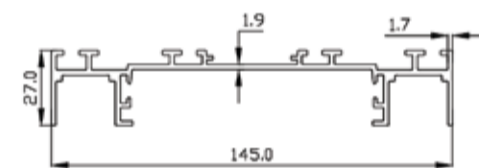


XTREME 145 DUO (DAISY-S)

Xtreme 145 Duo (Daisy-S) has :

- Extruded Aluminium Luminaire Housing
- Premium Finish Powder coating
- Lens + Prismatic double diffuser
- Glare control with Uniform illumination
- Energy efficient LED with high colour rendering
- LED PCB mounted on insert design with heat sink
- Snap fit system with No visible screw
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

Light Distribution

Direct Direct-Indirect



CRI ≥ 90



TUNABLE
WHITE

XTREM 145 DUO (DAISY-S)



XTREM 145 DUO (DAISY-S) (DIRECT)

System Power	Dimensions
18W	L = 600mm
35W	L = 1200mm
70W	L = 2400mm

XTREM 145 DUO (DAISY-S) (DIRECT-INDIRECT)

System Power	Dimensions
25W	L = 600mm
50W	L = 1200mm
100W	L = 2400mm

Order Options

Distribution

- Direct
- Indirect
- Up-50% / Down-50%
- Up-30% / Down-70%
- Up-70% / Down-30%
- Up-20% / Down-80%
- Up-80% / Down-20%

CCT (Color Temperature)

- 3000K
- 4000K
- 5700K
- Tunable 2700K-6500K



CRI

>90

Beam Angle

66.6°

Control

- ON-OFF
- ON-OFF (FLICKER FREE)
- DALI-2 DT6
- DALI-2 DT8
- DALI +



Mounting Type


- Pendent
- Recessed

Material Color

RAL As Per Request


Photometric

LUMINOUS INTENSITY DISTRIBUTION

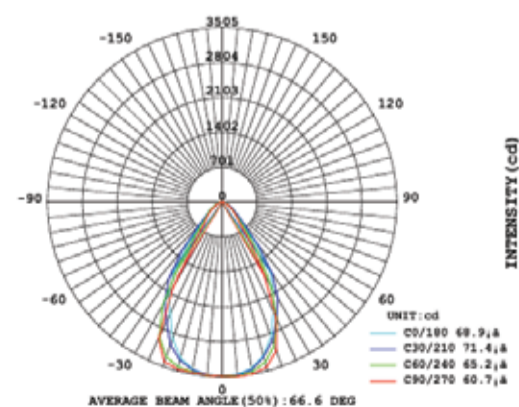


BEAM ANGLE OPTION

DAISY-7X1-BW

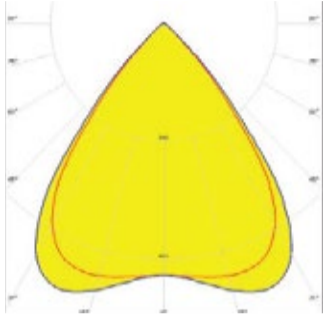


~80° Batwing Beam

DAISY-7X1-W

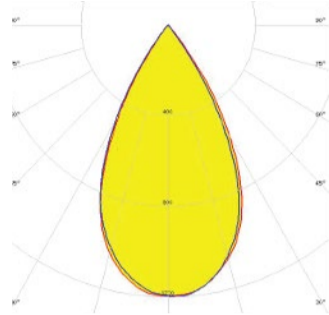


~50° Wide Beam

DAISY-7X1-W-D

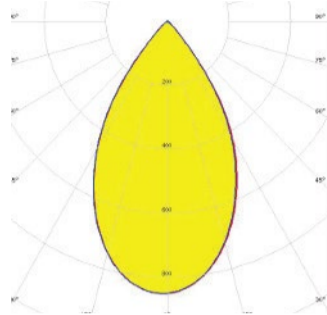


~50° Wide Beam

DAISY-7X1-O-D

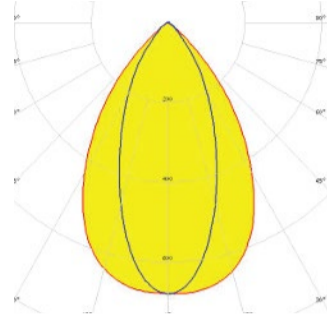


~25 + 70° Oval Beam

DAISY-7X1-M

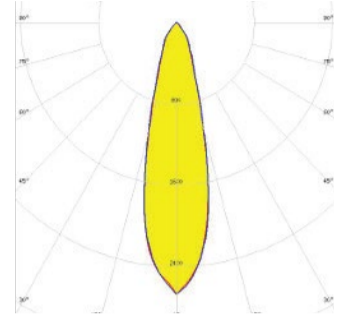


~35° Wide Beam

DAISY-7X1-FT-D

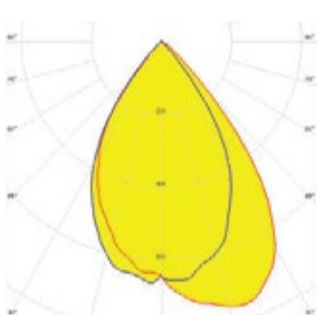


Forward Throwing Beam

DAISY-7X1-WW

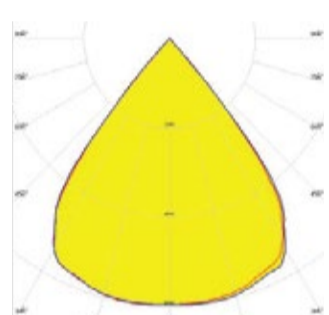


~80° wide Beam

DAISY-7X1-WW-D

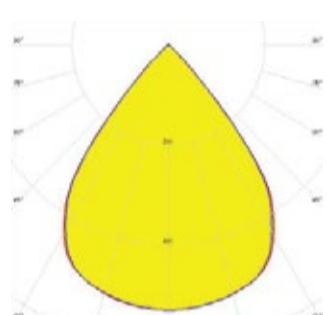


~80° Batwing Beam

DAISY-7X1-O

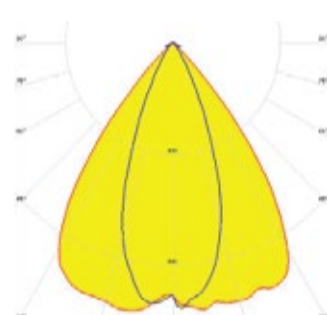


~25 + 70° Oval Beam

DAISY-7X1-WAS

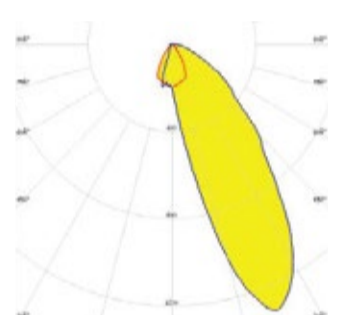


Asymmetric Beam for Wall-Washing

DAISY-7X1-M-D

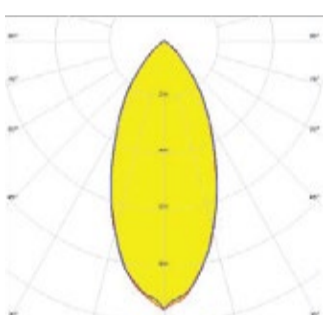


~35° Wide Beam

DAISY-7X1-W2

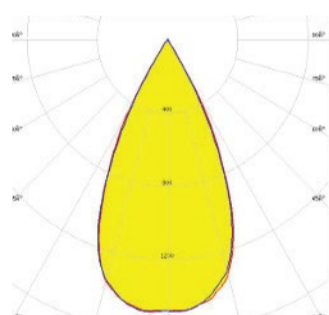


~50° Wide Beam

DAISY-7X1-W2-D

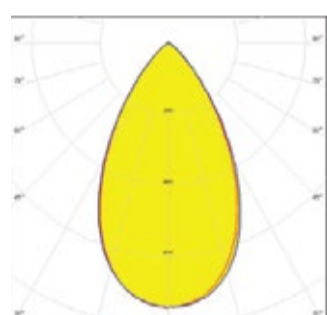


~50° Wide Beam

DAISY-7X1-ZT25

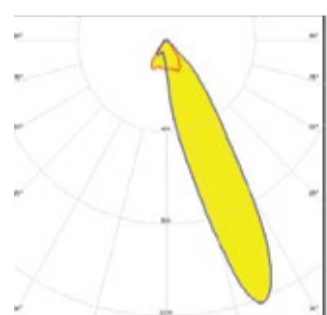

Asymmetric Beam for Aisle Lighting

DAISY-7X1-ZT25-D

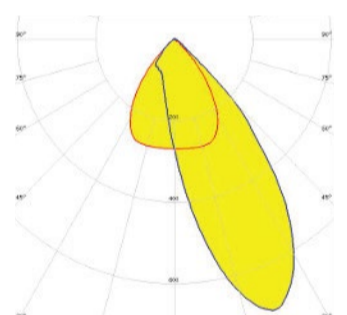

Asymmetric Beam for Aisle Lighting