


**XTREME 145  
PEGGY DUO (DAISY-S)**

**divinity lights**

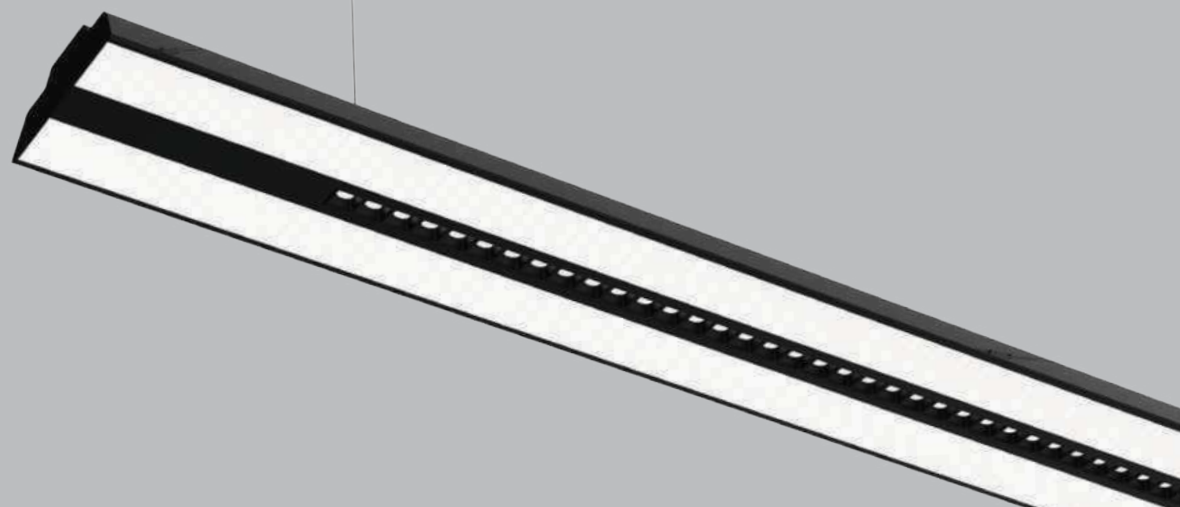

## Quick Info

CRI ≥ 80/ 90/ 95

3000K/ 4000K/ 5700K/ 6500K

Tunable White (2700K-6500K)

Up to 100lm/W

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 / DALI-2 DT8 / D4i / DALI +

POE (Power Over Ethernet)

SDCM<3

Lens + Micro Prismatic Diffuser

L70 @ 50,000h





Aluminium

## Types

Pendant/ Recessed

## Single Line Diagram

Pendant/ Recessed

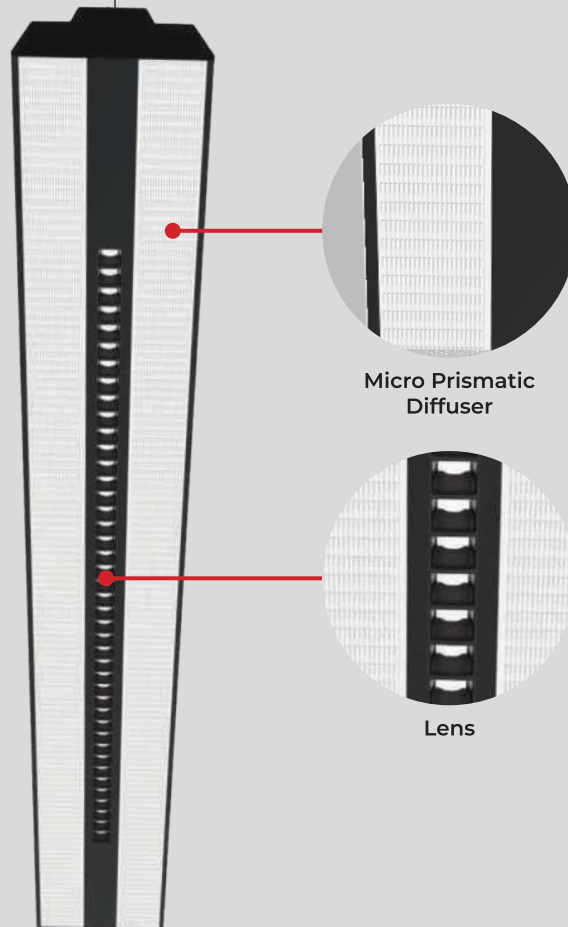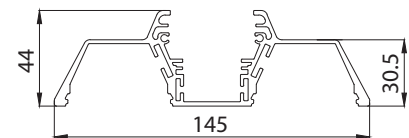

## XTREME 145 PEGGY DUO (DAISY-S)

Xtreme 145 Peggy Duo (Daisy-S) has:


- Luminaire housing of extruded aluminium
- Surface powder coated
- Snap-fit system and no visible screw
- Bottom opening for easy maintenance
- LED PCB mounted on insert design with heat sink
- Pendant with cable suspension
- M6 bolt for M6 fastener
- Lens + Prismatic double diffuser
- Energy-efficient LED with color rendering
- Glare control with Uniform illumination

## Colours



## Light Distribution

Direct Direct-Indirect



CRI ≥ 80/ 90/ 95



TUNABLE  
WHITE

## XTREME 145 PEGGY DUO (DAISY-S)



### XTREME 145 PEGGY DUO (DAISY-S) ( DIRECT )

| Product Order Code | System Power | Dimensions |
|--------------------|--------------|------------|
| 1030-1  1          | 30W          | L = 600mm  |
| 1030-1  2          | 60W          | L = 1200mm |
| 1030-1  3          | 120W         | L = 2400mm |

### XTREME 145 PEGGY DUO (DAISY-S) ( DIRECT-INDIRECT )

| Product Order Code | System Power | Dimensions |
|--------------------|--------------|------------|
| 1030-  1           | 50W          | L = 600mm  |
| 1030-  2           | 100W         | L = 1200mm |
| 1030-  3           | 150W         | L = 2400mm |

## Order Options

| Distribution      |   |
|-------------------|---|
| Direct            | 1 |
| Direct-Indirect   |   |
| Up-50% / Down-50% | 2 |
| Up-30% / Down-70% | 3 |
| Up-70% / Down-30% | 4 |
| Up-20% / Down-80% | 5 |
| Up-80% / Down-20% | 6 |

| Lumen Type |   |
|------------|---|
| Low        | 1 |
| High       | 2 |

| CCT (Colour Temperature)  |   |
|---------------------------|---|
| 3000K                     | 1 |
| 4000K                     | 2 |
| 5700K                     | 3 |
| 6500K                     | 4 |
| Tunable White 2700K-6500K | 5 |

| CRI |   |
|-----|---|
| >80 | 1 |
| >90 | 2 |
| >95 | 3 |










| Beam Angle |   |
|------------|---|
| 30°        | 1 |
| 55°        | 2 |
| 65°        | 3 |

| Control                   |   |
|---------------------------|---|
| ON-OFF                    | 1 |
| ON-OFF (FLICKER FREE)     | 2 |
| DALI-2                    | 3 |
| DALI-2 DT8                | 4 |
| DALI +                    | 5 |
| D4i                       | 6 |
| POE (Power Over Ethernet) | 7 |

| Mounting Type |   |
|---------------|---|
| Pendant       | 1 |
| Recessed      | 2 |

| Material Colour |   |
|-----------------|---|
| Black           | 1 |
| White           | 2 |
| Grey            | 3 |

## Accessories


| Product Order Code  | Accessories Name         | Accessories Image   |
|---|--------------------------|---|
| 1030-01 <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> | LED PCB                  |    |
| 1030-02   | Suspension Wire          |    |
| 1030-03   | 30° Lens                 |    |
| 1030-04   | 55° Lens                 |   |
| 1030-05   | 65° Lens                 |  |
| 1030-06   | PMMA Diffuser            |  |
| 1030-07   | Micro Prismatic Diffuser |  |
| 1030-08   | Profile Connector        |  |
| 1030-09 <input type="checkbox"/>  | Profile Endcap           |  |

## Order Options

### Lumen Type

- Low 1
- High 2

### CCT (Colour Temperature)

- 3000K 1
- 4000K 2
- 5700K 3
- 6500K 4
- Tunable White 2700K-6500K  5

### CRI

- >80 1
- >90 2
- >95 3

### Material Colour

- Black  1
- White  2
- Grey  3