


**XTREME 145  
PEGGY DUO (XTD)**

**divinity lights**

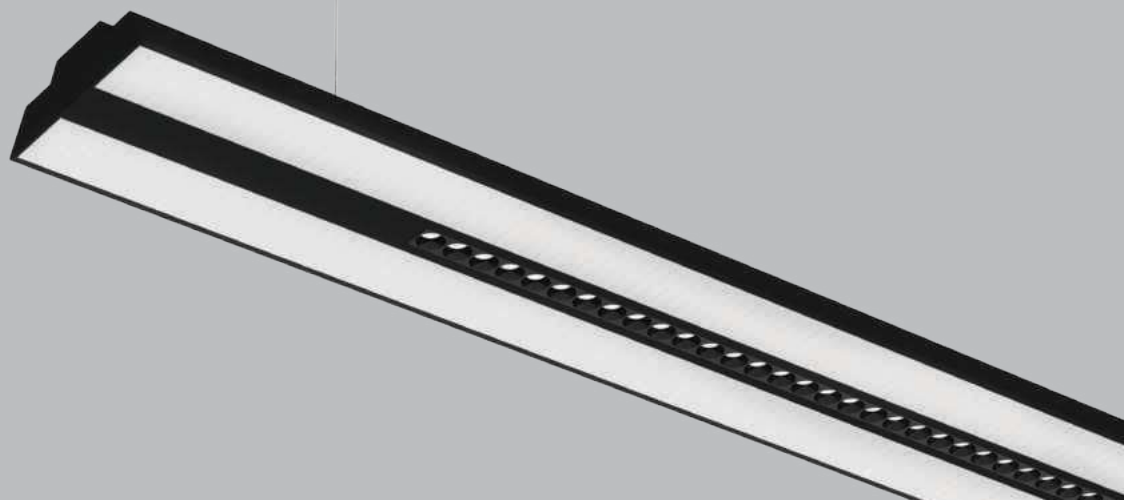

# divinity lights

## Quick Info

CRI  $\geq$  80/ 90/ 95

3000K/ 4000K/ 5700K/ 6500K

Tunable White (2700K-6500K)

Up to 100lm/W

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 / DALI-2 DT8 / D4i / DALI +

POE (Power Over Ethernet)

SDCM<3

Lens + Micro Prismatic Diffuser

L70 @ 50,000h




Aluminium

## Types

Pendant/ Recessed

## Single Line Diagram

Pendant/ Recessed

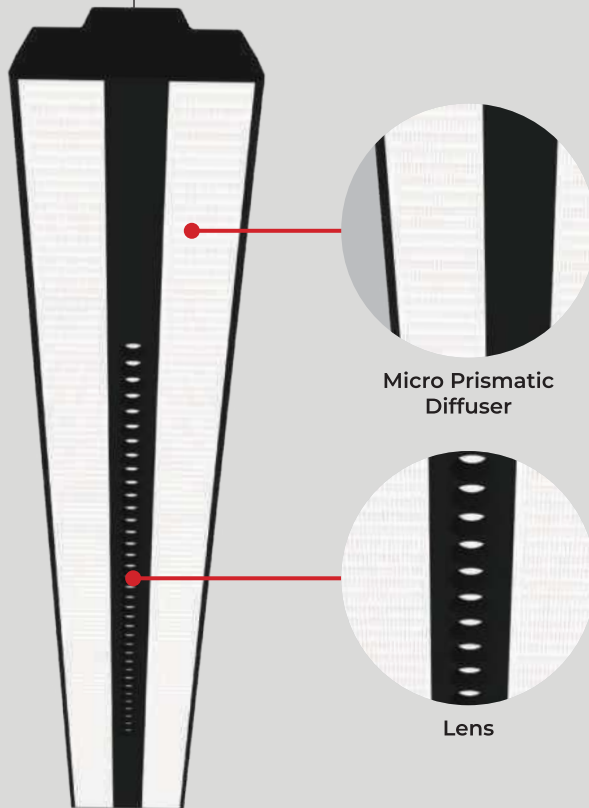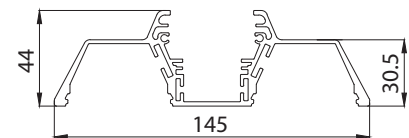

## XTREME 145 PEGGY DUO (XTD)

Xtreme 145 Peggy Duo (XTD) has :


- Luminaire housing of extruded aluminium
- Surface powder coated
- LED PCB mounted on insert design with heat sink
- Snap-fit system and no visible screws
- Bottom opening for easy maintenance
- Pendant with cable suspension
- M6 bolt for M6 fastener
- Lens + Prismatic double diffuser with glare control
- Uniform illumination
- Energy-efficient LED with color rendering

## Colours



## Light Distribution

Direct Direct-Indirect



CRI  $\geq$  80/ 90/ 95



TUNABLE  
WHITE

## XTREME 145 PEGGY DUO (XTD)



### XTREME 145 PEGGY DUO (XTD) ( DIRECT )

Product Order Code	System Power	Dimensions
1031-1  1	30W	L = 600mm
1031-1  2	60W	L = 1200mm
1031-1  3	120W	L = 2400mm

### XTREME 145 PEGGY DUO (XTD) ( DIRECT-INDIRECT )

Product Order Code	System Power	Dimensions
1031-  1	50W	L = 600mm
1031-  2	100W	L = 1200mm
1031-  3	150W	L = 2400mm

## Order Options

Distribution	
Direct	1
Direct-Indirect	
Up-50% / Down-50%	2
Up-30% / Down-70%	3
Up-70% / Down-30%	4
Up-20% / Down-80%	5
Up-80% / Down-20%	6

Lumen Type	
Low	1
High	2

CCT (Colour Temperature)	
3000K	1
4000K	2
5700K	3
6500K	4
Tunable White 2700K-6500K	5

CRI	
>80	1
>90	2
>95	3










Beam Angle	
30°	1
55°	2
65°	3

Control	
ON-OFF	1
ON-OFF (FLICKER FREE)	2
DALI-2	3
DALI-2 DT8	4
DALI +	5
D4i	6
POE (Power Over Ethernet)	7

Mounting Type	
Pendant	1
Recessed	2

Material Colour	
Black	1
White	2
Grey	3

## Accessories


Product Order Code	Accessories Name	Accessories Image
1031-01 <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	LED PCB	
1031-02	Suspension Wire	
1031-03	24° Lens	
1031-04	50° Lens	
1031-05	50°X50° Lens	
1031-06	PMMA Diffuser	
1031-07	Micro Prismatic Diffuser	
1031-08	Profile Connector	
1031-09 <input type="checkbox"/>	Profile Endcap	

## Order Options

### Lumen Type

- Low 1
- High 2

### CCT (Colour Temperature)

- 3000K 1
- 4000K 2
- 5700K 3
- 6500K 4
- Tunable White 2700K-6500K  5

### CRI

- >80 1
- >90 2
- >95 3

### Material Colour

- Black  1
- White  2
- Grey  3