


**XTREME 145
PEGGY DUO (DAISY-S)**

divinity lights

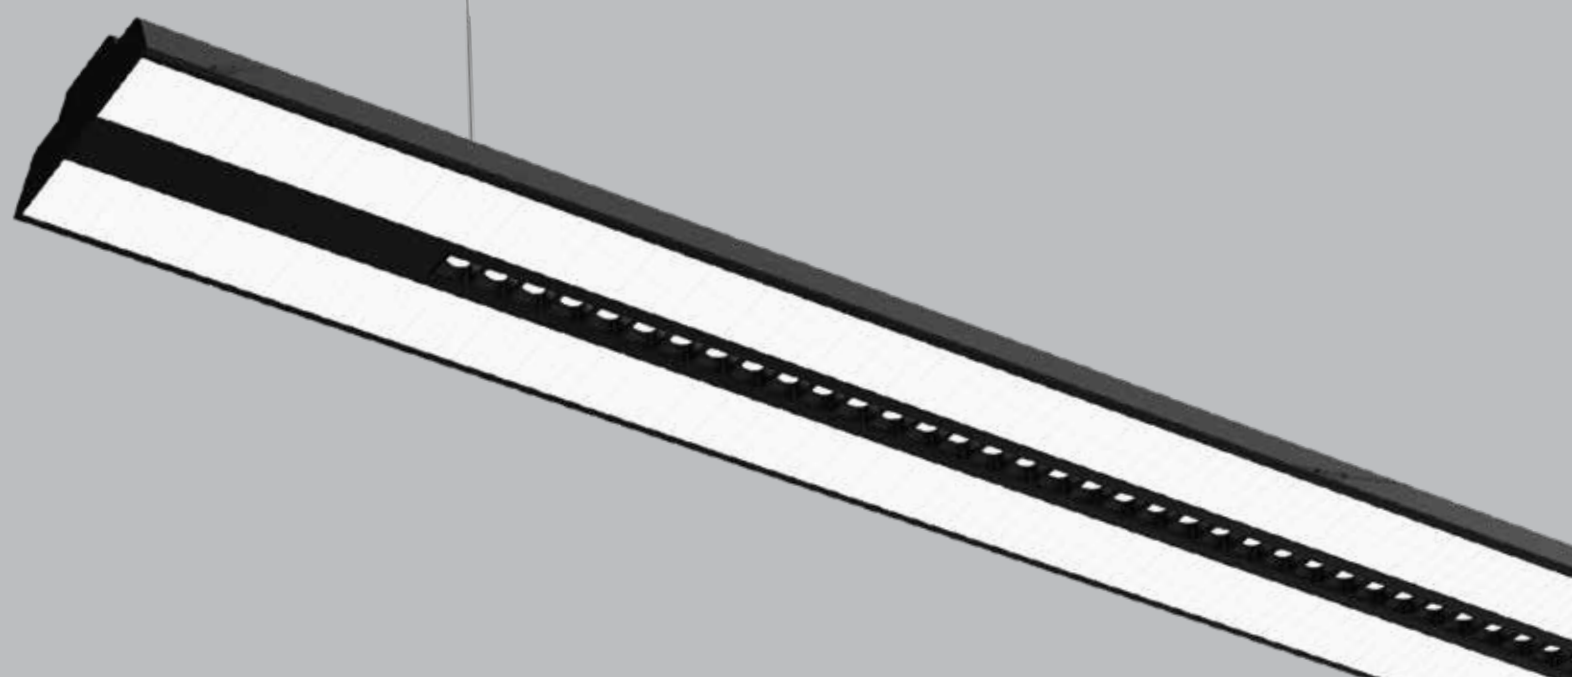

divinity lights

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable White (2700K-6500K)

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI +

SDCM<3

Lens + Micro Prismatic Diffuser

L70 @ 50,000h




Aluminium

Types

Pendant

Single Line Diagram

Pendant

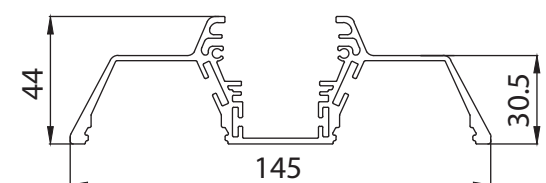

XTREME 145 PEGGY DUO (DAISY-S)

Xtreme 145 Peggy Duo (DAISY-S) has:


- Extruded Aluminium Luminaire Housing
- Premium Finish Powder coating
- Lens + Prismatic double diffuser
- Glare control with Uniform illumination
- Energy efficient LED with high colour rendering
- LED PCB mounted on insert design with heat sink
- Snap fit system with No visible screw
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

Colours



Light Distribution

Direct Direct-Indirect



CRI ≥ 90



TUNABLE WHITE

XTREME 145 PEGGY DUO (DAISY-S)



XTREME 145 PEGGY DUO (DAISY-S) (DIRECT)

Product Order Code	System Power	Dimensions
1030-1  1	18W	L = 600mm
1030-1  2	35W	L = 1200mm
1030-1  3	70W	L = 2400mm

XTREME 145 PEGGY DUO (DAISY-S) (DIRECT-INDIRECT)

Product Order Code	System Power	Dimensions
1030-  1	25W	L = 600mm
1030-  2	50W	L = 1200mm
1030-  3	100W	L = 2400mm

Order Options

Distribution		
Direct		1
Direct-Indirect		
Up-50% / Down-50%		2
Up-30% / Down-70%		3
Up-70% / Down-30%		4
Up-20% / Down-80%		5
Up-80% / Down-20%		6
CCT (Colour Temperature)		
3000K		1
4000K		2
5700K		3
Tunable White 2700K-6500K		4
CRI		
>90		1
Beam Angle		
30°		1
55°		2
65°		3
Control		
ON-OFF		1
ON-OFF (FLICKER FREE)		2
DALI-2 DT6		3
DALI-2 DT8		4
DALI +		5
Mounting Type		
Pendant		1
Material Colour		
Black		1
White		2
Grey		3

Accessories

Product Order Code	Accessories Name	Accessories Image
1030-01 	LED PCB	
1030-02	Suspension Wire	
1030-03	30° Lens	
1030-04	55° Lens	
1030-05	65° Lens	
1030-06	PMMA Diffuser	
1030-07	Micro Prismatic Diffuser	
1030-08	Profile Connector	
1030-09 	Profile Endcap	

Order Options

CCT (Colour Temperature)

3000K

4000K

5700K

Tunable White 2700K-6500K



1

2

3

4

CRI

>90

1

Material Colour

Black

White

Grey







1

2

3