


**XTREME 145
PEGGY DUO (DAISY-S)**

Direct | Pendant



XTREME 145 PEGGY DUO (DAISY-S)

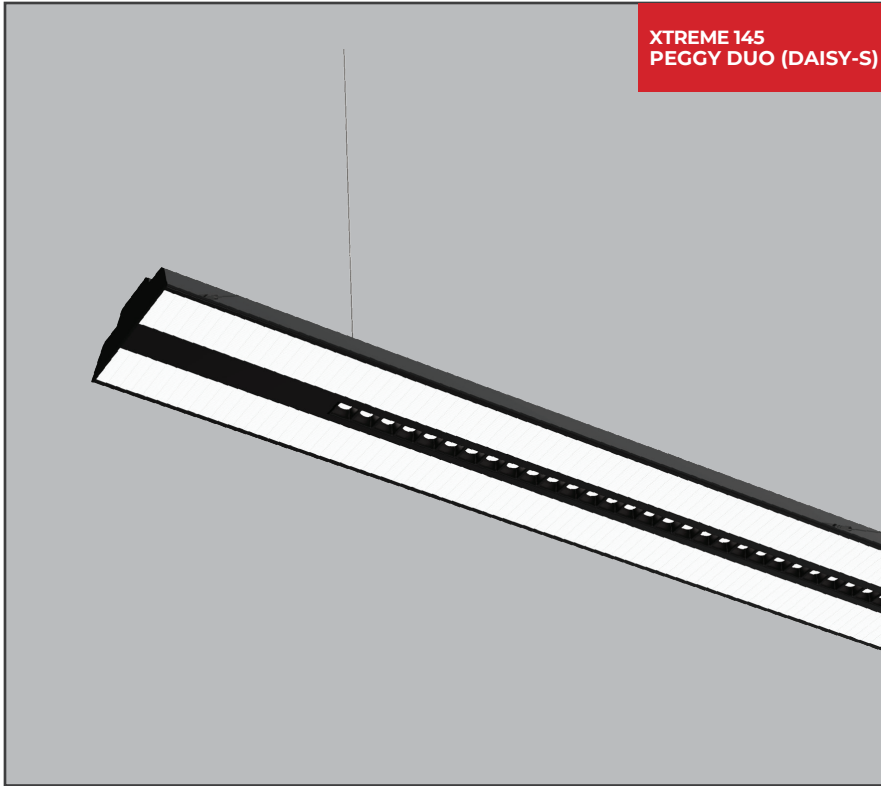

Quick Info

Mounting Type

Pendant

Material Colour

Customize RAL available

Protection mode

IP40

Driver Details

ON/OFF/, DALI-2 DT6 / DALI-2 DT8/ DALI +

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6500K

CRI- ≥ 90

Life Span - L70@50000h

MacAdam - ≤ 3 SDCM

Beam Angle

35°

55°

65°

Optics

Lens

Opal Diffuser

Micro Prismatic Diffuser

Efficacy

3000K- 107.3

4000K- 122.9

5700K- 140.4

Tunable White 2700K-6500K- 122.9

Electrical

Wattage - 35W/4ft

Opt Wattages Available -20W/4ft, 25W/4ft, 30W/4ft

Input Voltage- 220-240 VAC

Physical

Length- 1200mm

Height- 44mm

Width- 145 mm

XTREME 145 PEGGY DUO (DAISY-S) Linear Luminaire in a sleek design with a slim Extruded aluminium housing and with premium powder coating finish.

Powered by high-quality LED's with a binning tolerance of ≤ 3 SDCM and CRI ≥ 90 . The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long-term reliability. Dual optics of high efficiency lens with 3 beam angle options of 30°/55°/65° + Micro prismatic diffuser provides uniform illumination and glare control.

With a standard size of 1200 mm length, 44mm height and 145mm width this fixture is crafted for direct light distribution making it ideal for professional applications.

Customisations in RAL finish, Wattages and Length available as per request to enhance installation and functionality.

Single Line Diagram

Pendant

