


**XTREME 145
PEGGY PRISMATIC**

divinity lights



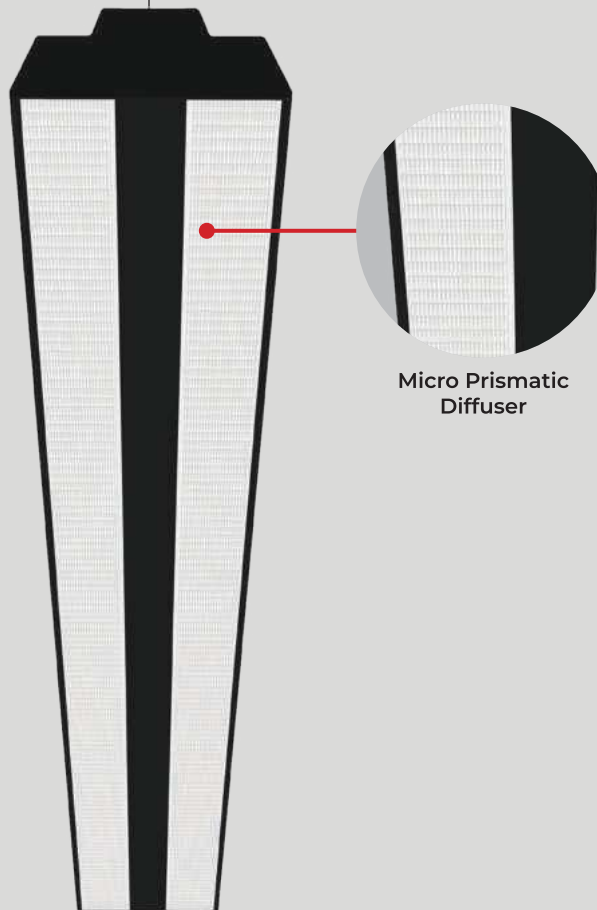

Quick Info




CRI ≥ 80/ 90/ 95
 3000K/ 4000K/ 5700K/ 6500K
 Tunable White (2700K-6500K)
 Up to 100lm/W
 ON-OFF/ON-OFF (FLICKER FREE)
 DALI-2 / DALI-2 DT8 / D4i / DALI +
 POE (Power Over Ethernet)
 SDCM<3
 Micro Prismatic Diffuser
 L70 @ 50,000h
 Aluminium

Types

Pendant/ Recessed

Single Line Diagram

Pendant/ Recessed

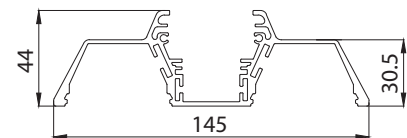

XTREME 145 PEGGY PRISMATIC

Xtreme 145 Peggy Prismatic has :


- Luminaire housing of extruded aluminium
- Surface powder coated
- LED PCB mounted on insert design with heat sink
- Snap-fit system and no visible screws
- Bottom opening for easy maintenance
- Pendant with cable suspension
- M6 bolt for M6 fastener
- Recessed mounted with tech zone
- Lens + Prismatic double diffuser
- Uniform illumination and glare control
- Energy-efficient LED with color rendering

Colours



Light Distribution

Direct Direct-Indirect



CRI ≥ 80/ 90/ 95



TUNABLE
WHITE

XTREME 145 PEGGY PRISMATIC



XTREME 145 PEGGY PRISMATIC (DIRECT)

Product Order Code	System Power	Dimensions
1032-1 1	30W	L = 600mm
1032-1 2	60W	L = 1200mm
1032-1 3	120W	L = 2400mm

XTREME 145 PEGGY PRISMATIC (DIRECT-INDIRECT)

Product Order Code	System Power	Dimensions
1032- 1	50W	L = 600mm
1032- 2	100W	L = 1200mm
1032- 3	150W	L = 2400mm

Order Options

Distribution

Direct	1
Direct-Indirect	
Up-50% / Down-50%	2
Up-30% / Down-70%	3
Up-70% / Down-30%	4
Up-20% / Down-80%	5
Up-80% / Down-20%	6

Lumen Type

Low	1
High	2

CCT (Colour Temperature)

3000K	1
4000K	2
5700K	3
6500K	4
Tunable White 2700K-6500K	5

CRI

>80	1
>90	2
>95	3

Beam Angle

110°

Control

ON-OFF	1
ON-OFF (FLICKER FREE)	2
DALI-2	3
DALI-2 DT8	4
DALI +	5
D4i	6
POE (Power Over Ethernet)	7







Mounting Type

Pendant	1
Recessed	2

Material Colour

Black	1
White	2
Grey	3

Accessories


Product Order Code	Accessories Name	Accessories Image
1032-01 <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	LED PCB	
1032-02	Suspension Wire	
1032-03	PMMA Diffuser	
1032-04	Micro Prismatic Diffuser	
1032-05	Profile Connector	
1032-06 <input type="checkbox"/>	Profile Endcap	

Order Options

Lumen Type

- Low 1
- High 2

CCT (Colour Temperature)

- 3000K 1
- 4000K 2
- 5700K 3
- 6500K 4
- Tunable White 2700K-6500K  5

CRI

- >80 1
- >90 2
- >95 3

Material Colour

- Black 1
- White 2
- Grey 3