

**XTREME 145  
PEGGY PRISMATIC**

**divinity lights**



# divinity lights

## Quick Info

CRI  $\geq 90$

3000K/ 4000K/ 5700K

Tunable White 2700-6500K

ON-OFF/ ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM <3

Micro Prismatic Diffuser

L70 @50,000h

Aluminium

## Types



Pendant/ Recessed

## Single Line Diagram

Pendant/ Recessed Mounted

Profile Code

SY-117

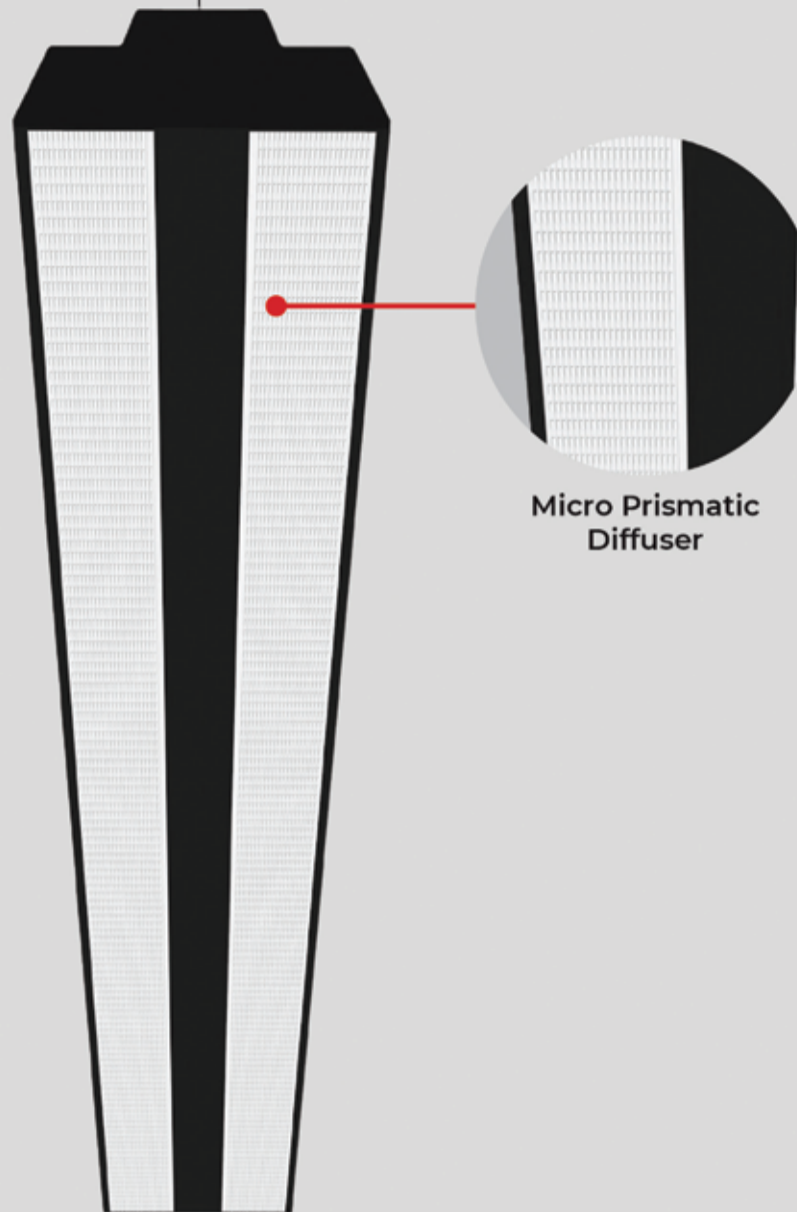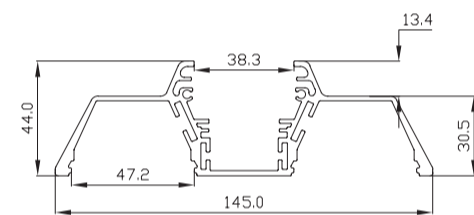


## XTREME 145 PEGGY PRISMATIC

Xtreme 145 Peggy Prismatic has :

- Extruded Aluminium Luminaire Housing
- Premium Finish Powder coating
- High performance Prismatic double diffuser
- Glare control & uniform light distribution
- Energy efficient LED with high colour rendering
- LED PCB mounted on insert design with heat sink
- Snap-fit system and no visible screw
- Recessed mounted with tech zone
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

## Light Distribution

Direct Direct-Indirect



CRI  $\geq 90$



TUNABLE  
WHITE

**XTREM 145 PEGGY PRISMATIC**



**XTREM 145 PEGGY PRISMATIC (DIRECT)**

System Power	Dimensions
18W	L = 600mm
35W	L = 1200mm
70W	L = 2400mm

**XTREM 145 PEGGY PRISMATIC (DIRECT-INDIRECT)**

System Power	Dimensions
25W	L = 600mm
50W	L = 1200mm
100W	L = 2400mm

**Order Options**

**Distribution**

- Direct
- Indirect
- Up-50% / Down-50%
- Up-30% / Down-70%
- Up-70% / Down-30%
- Up-20% / Down-80%
- Up-80% / Down-20%

**CCT (Color Temperature)**

- 3000K
- 4000K
- 5700K
- Tunable 2700K-6500K



**CRI**

>90

**Beam Angle**

56.2°

**Control**

- ON-OFF
- ON-OFF (FLICKER FREE)
- DALI-2 DT6
- DALI-2 DT8
- DALI +



**Mounting Type**

- Pendent
- Recessed

**Material Color**

RAL As Per Request

**Photometric**