


**XTREME 245
CURVE**

divinity lights

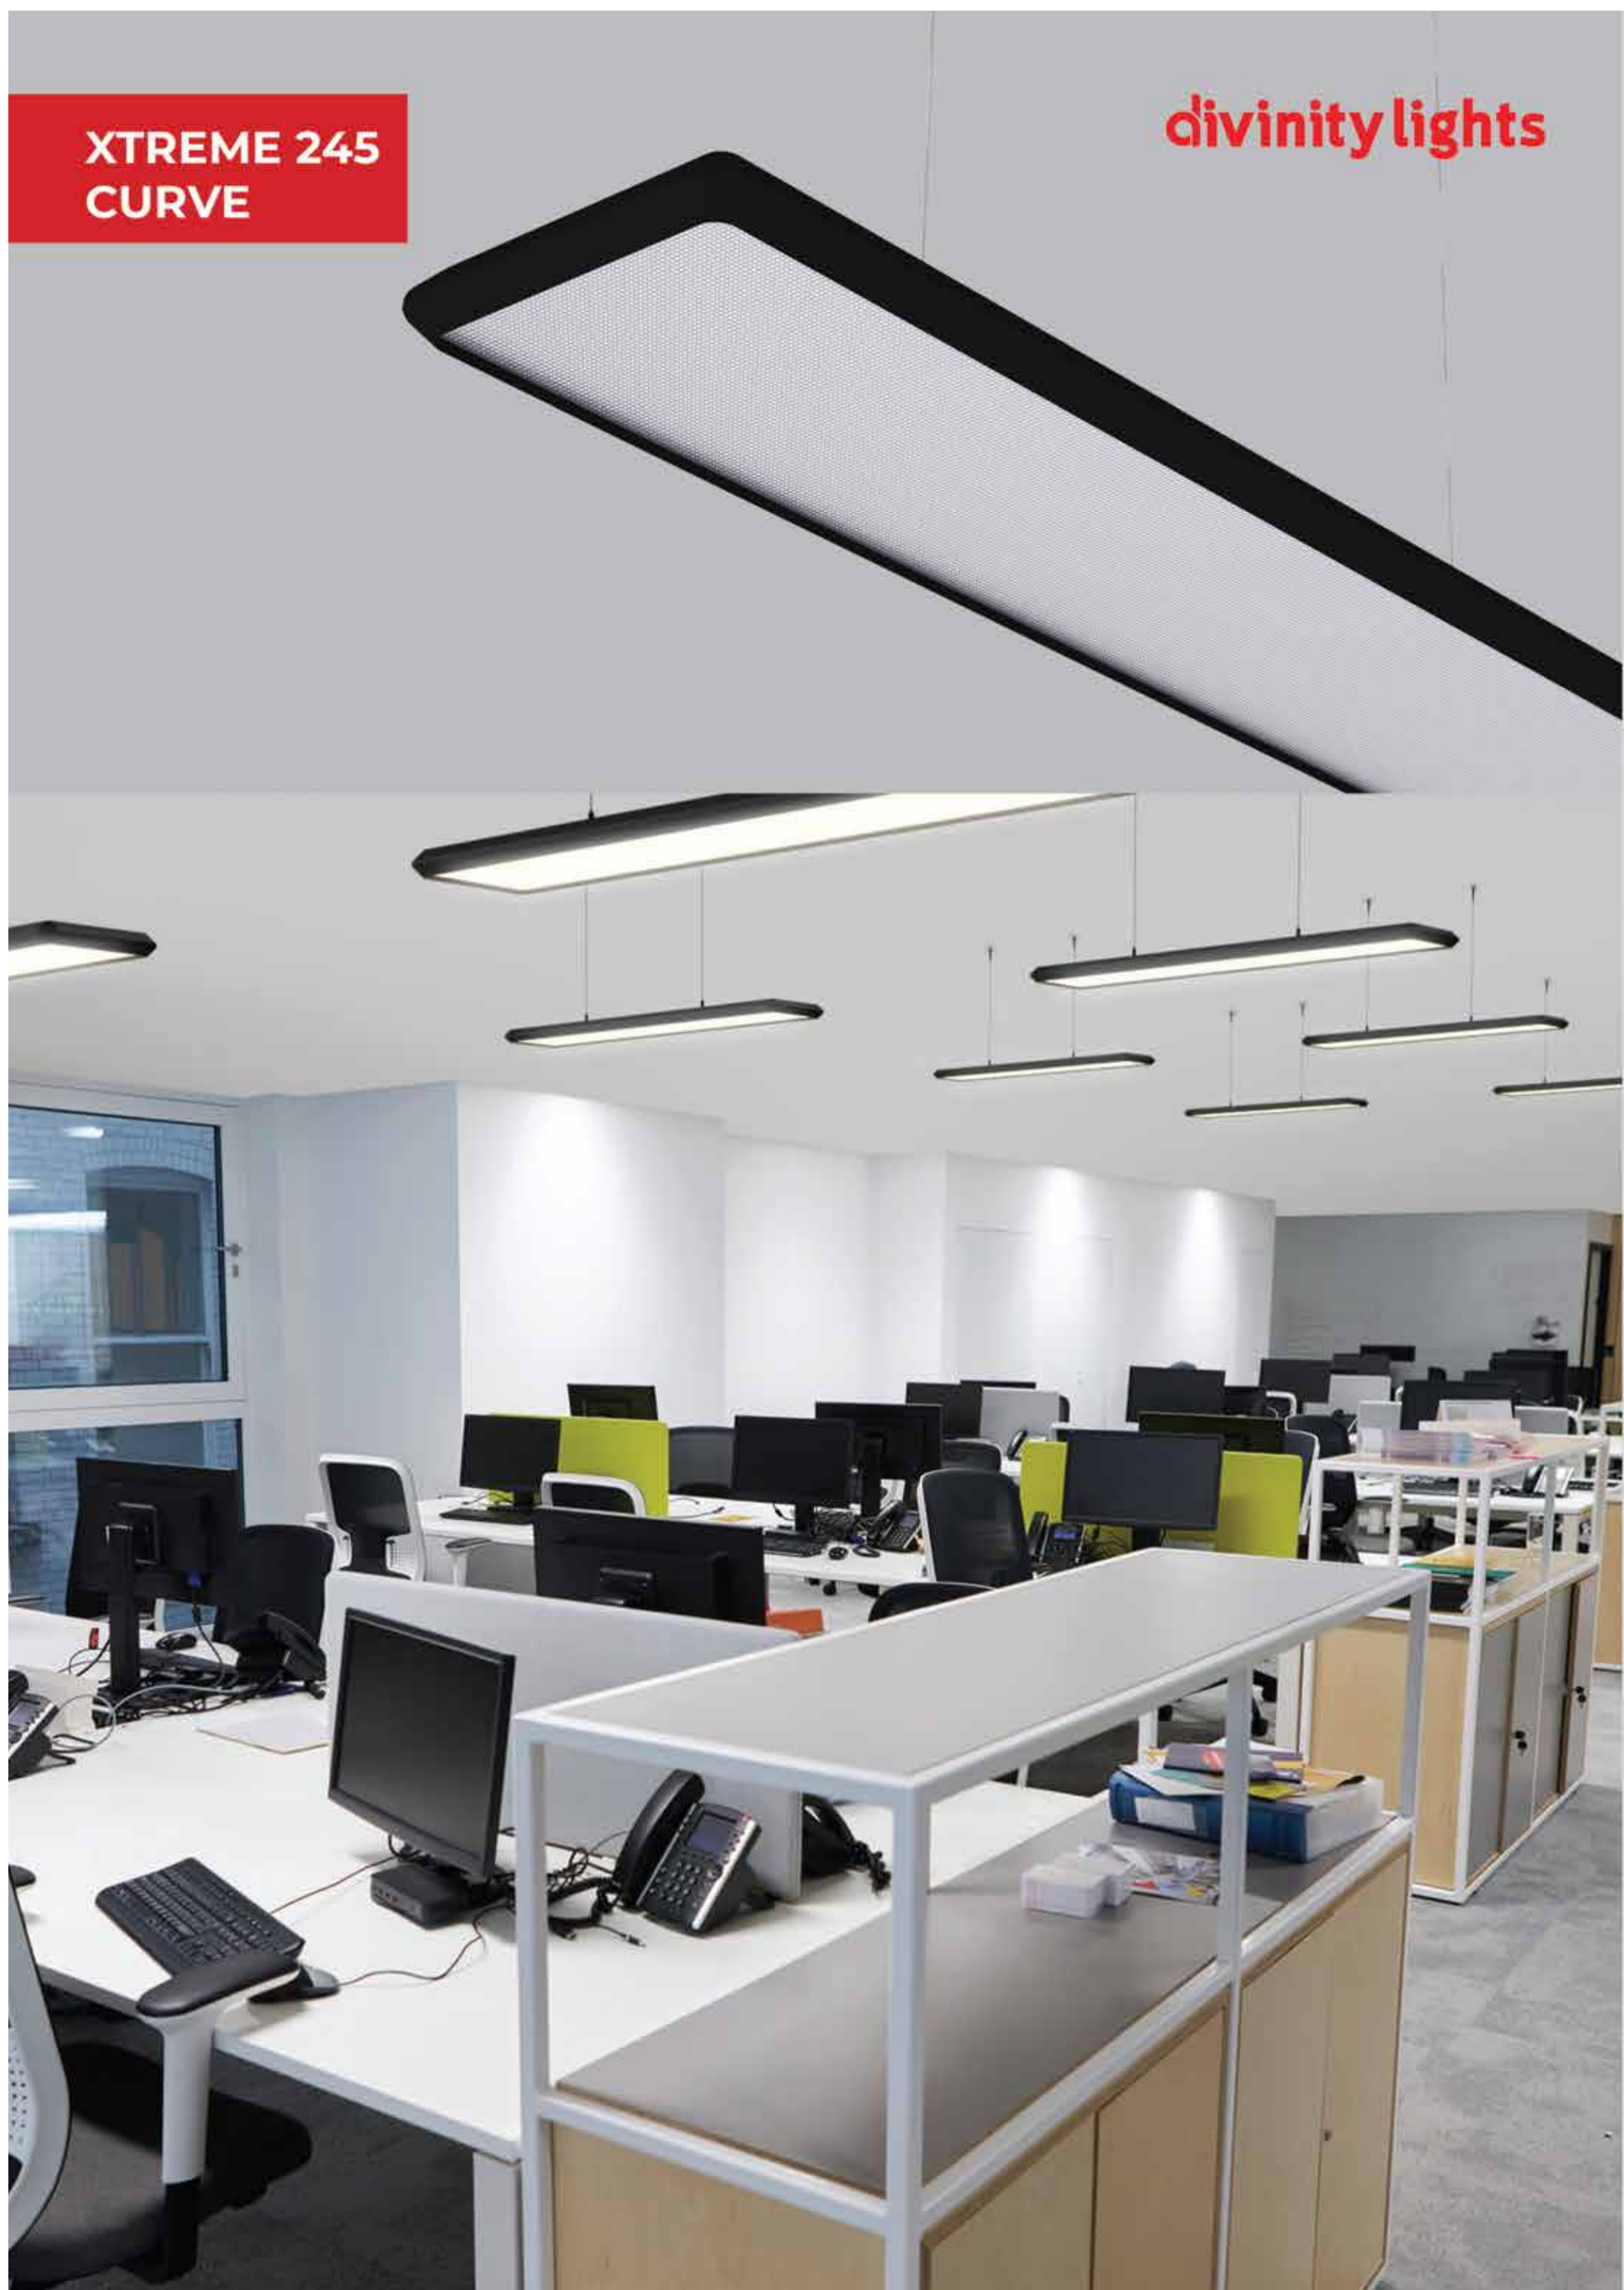

divinity lights

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable White 2700-6500K

ON-OFF/ ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM <3

Micro Prismatic Diffuser

L70 @50,000h

Aluminium

Types


Pendant

Single Line Diagram



Pendant Mounted

Profile Code

SDL-9001

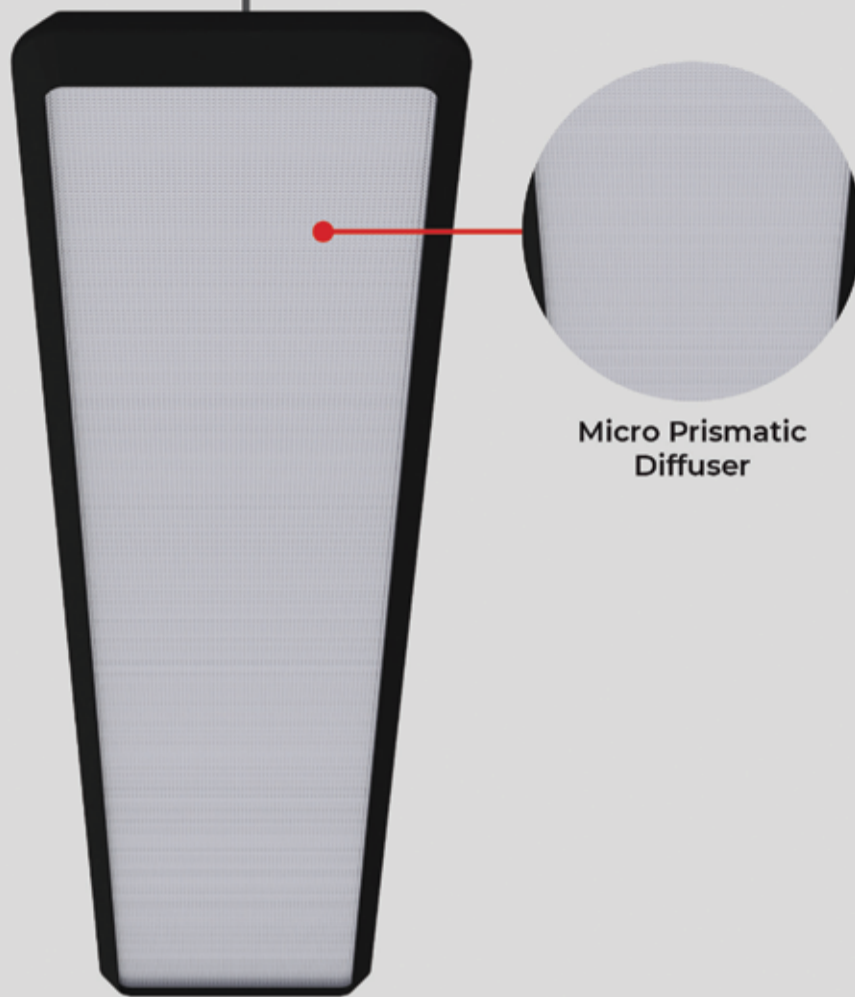

Micro Prismatic Diffuser




XTREME 245 CURVE

Xtreme 245 Curve has :

- Extruded Aluminium Luminaire Housing
- Premium Finish Powder coating
- High performance Prismatic double diffuser
- Glare control & uniform light distribution
- Energy efficient LED with high colour rendering
- LED PCB mounted on insert design with heat sink
- Snap-fit system and no visible screw
- M6 bolt for M6 fastener
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

Light Distribution

Direct Direct-Indirect



CRI ≥ 90



TUNABLE
WHITE

XTREM 245 CURVE



XTREM 245 CURVE (DIRECT)

System Power	Dimensions
18W	L = 600mm
35W	L = 1200mm
70W	L = 2400mm

XTREM 245 CURVE (DIRECT-INDIRECT)

System Power	Dimensions
25W	L = 600mm
50W	L = 1200mm
100W	L = 2400mm

Order Options

Distribution

- Direct
- Indirect
- Up-50% / Down-50%
- Up-30% / Down-70%
- Up-70% / Down-30%
- Up-20% / Down-80%
- Up-80% / Down-20%

CCT (Color Temperature)

- 3000K
- 4000K
- 5700K
- Tunable 2700K-6500K



CRI

>90

Beam Angle

38.9°

Control

- ON-OFF
- ON-OFF (FLICKER FREE)
- DALI-2 DT6
- DALI-2 DT8
- DALI +



Mounting Type

- Pendent
- Recessed

Material Color

RAL As Per Request

Photometric