


## XTREME DUO PEGGY ANTIGLARE

Direct | Pendant

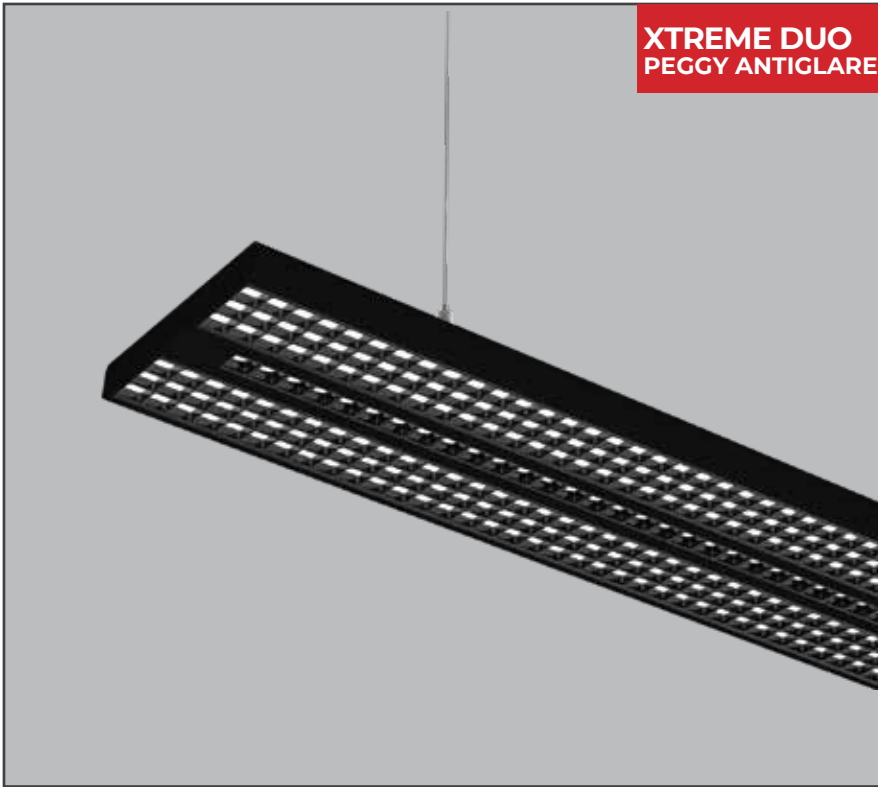

**XTREME DUO PEGGY ANTIGLARE** Linear Luminaire with Extruded aluminium housing and with premium powder coating finish.

Powered by high quality LED's with a binning tolerance of  $\leq 3$  SDCM and CRI  $\geq 90$ . The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long term reliability. A new concept on Louver technology available in lens + antiglare reflector provides high glare control and uniform illumination

With a standard size of 1200 mm length, 31.25mm height and 190mm width, this fixture is crafted for direct light distribution making it ideal for professional applications.


Customisations in RAL finish, Wattages and Length available as per request to enhance installation and functionality.

### Single Line Diagram

Recessed Mounted

Profile Code

SY-8001

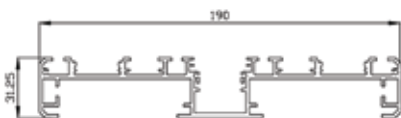

## XTREME DUO PEGGY ANTIGLARE



### Quick Info

#### Mounting Type

Pendant

#### Material Colour

Customize RAL available

#### Protection mode

IP40

#### Driver Details

ON/OFF/, DALI-2 DT6 / DALI-2 DT8/ DALI +

Power Factor (PF) -0.95

THD- <10%

UGR - <19

#### LED

CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6500K

CRI-  $\geq 90$

Life Span - L70@50000h

MacAdam -  $\leq 3$  SDCM

#### Beam Angle

110°

#### Optics

Lens

Antiglare Reflector

#### Efficacy

3000K- 108.0

4000K- 120.4

5700K- 133.6

Tunable White 2700K-6500K- 120.4

#### Electrical

Wattage - 35W/4ft

Opt Wattages Available -20W/4ft, 25W/4ft, 30W/4ft

Input Voltage- 220-240 VAC

#### Physical

Length- 1200mm

Height- 31.25mm

Width- 190 mm