


ZENO-T
BOLLARD

divinitylights





ZENO-T BOLLARD

Zeno-T Bollard fixture has :

- Luminaire housing of Aluminium
- IP66, High Ingress Protection against dust & moisture
- Flicker free operation for eye protection
- Energy-efficient LED with high colour rendering
- The built quality ensures long and maintenance free service life
- Optimum for every outdoor space including society parks, streets, educational institutes, and pathways
- Garden & pathway luminaires create pleasant light distribution with a high degree of visual comfort
- LED bollards, designed to provide radially symmetric light emission
- Sustainable LED technology offers durability and optimal light output with low power consumption

Quick Info

CRI ≥ 90

2700K, 3000K, 4000K

Non-Dimmable/ Dali-Dimmable

SDCM<3

Clear Glass



L70 @50,000h

Aluminium Die-Cast

Types

Surface

Single Line Diagram

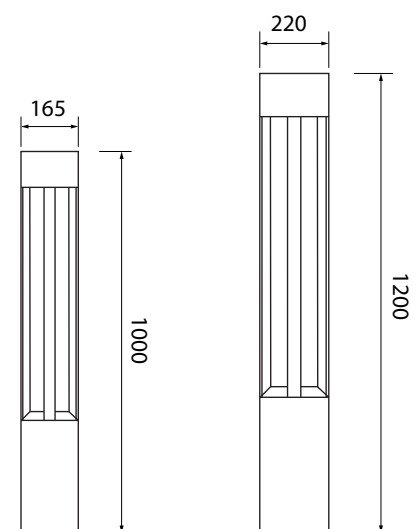

CRI ≥ 90

ZENO-T BOLLARD



Product Order Code	System Power	Dimensions
1861	12W	Dia=165mm H=1000mm
1862	24W	Dia=220mm H=1200mm

Order Options

CCT (Colour Temperature)

2700K
3000K
4000K

CRI

>90

Beam Angle

N.A

Control

Non-Dimmable 
Dali-Dimmable 

Mounting Type

Surface

Material Colour

Grey 